
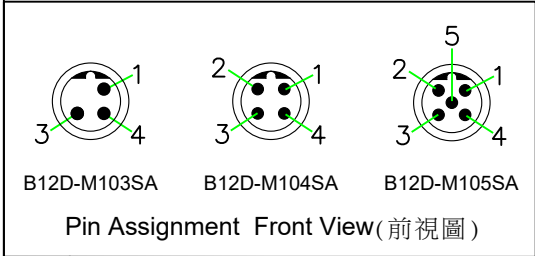


RoHS


REV.	DESCRIPTION	DATE
A	ISSUE	Oct/02/2025

NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: B12D-M1xxSA

03 - 3 PINS
04 - 4 PINS
05 - 5 PINS

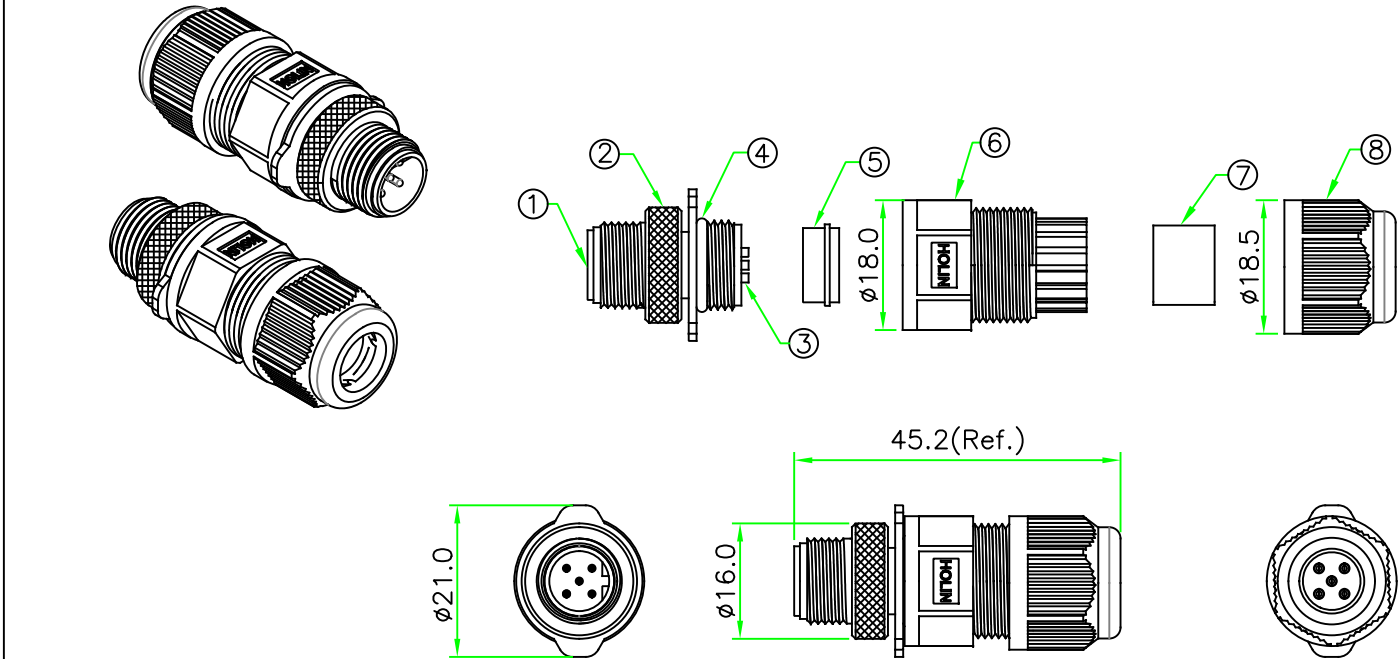

#2 Zipper PE Bag.

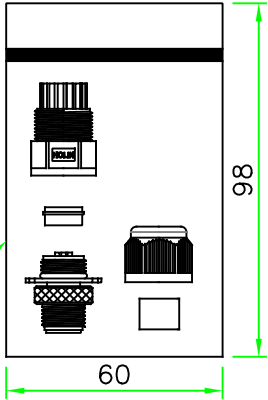

8	CLAMP NUT	NYLON+GF.	BLACK	1		HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司				
7	TUBE	EPDM.	BLACK	1						
6	HOOD	NYLON.	BLACK	1			UNIT: mm	TITLE M12 B-Coding Male Connector Male Pin With Solder Bucket Field Installable Plug		
5	GASKET	SILICON.	BLACK	1		SCALE	1:1			
4	O-RING	SILICON.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5, .XX ± 0.25 .XXX± 0.1 ANGLE ± 1° REV.		P/N:	B12D-M1xxSA	DR. RUBY
3	CONTACT	BRASS, Male Pin. 6u" Gold Plated.		N						CH. SIBYL
2	RING NUT	BRASS, Nickel Plated.		1				SHEET	1/1	DWG.NO:
1	CONNECTOR	M12 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1		A				
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS					