




RoHS

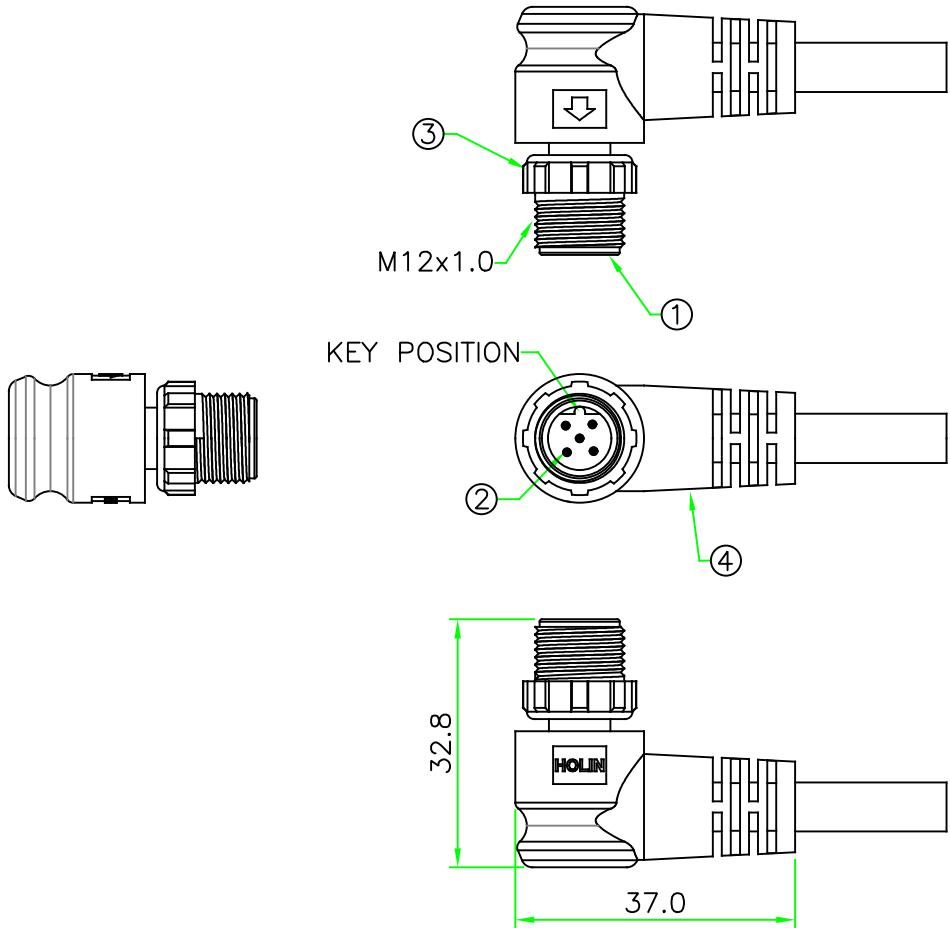


REV.	DESCRIPTION	DATE
A	ISSUE	Dec/19/2024

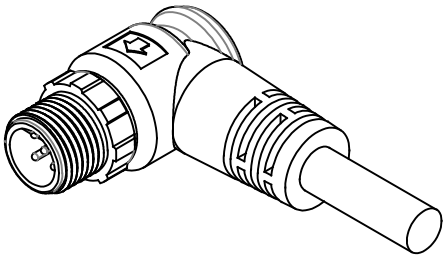


- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: B12D-P1xxRM
03 - 3 PINS
04 - 4 PINS
05 - 5 PINS



B12D-P103RM



B12D-P104RM



B12D-P105RM

PIN ASSIGNMENT FRONT VIEW (前視圖)

*Cable specification and length can be customized.

4	OVERMOLD	PU or PVC.	BLACK	1	90-135
3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	M12 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : M12 B-Coding Male All Plastic R/A Molded Cable		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N:		DR. SIBYL	
REV.		SHEET		CH. JAMES	
A		1/1		AP.	
		DWG.NO:		B12D-P1xxRM	