

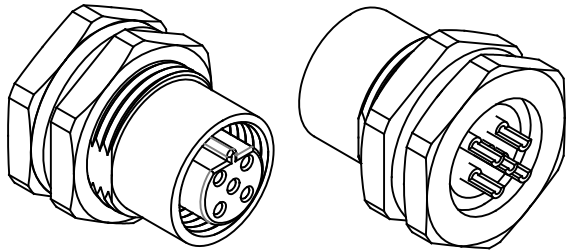

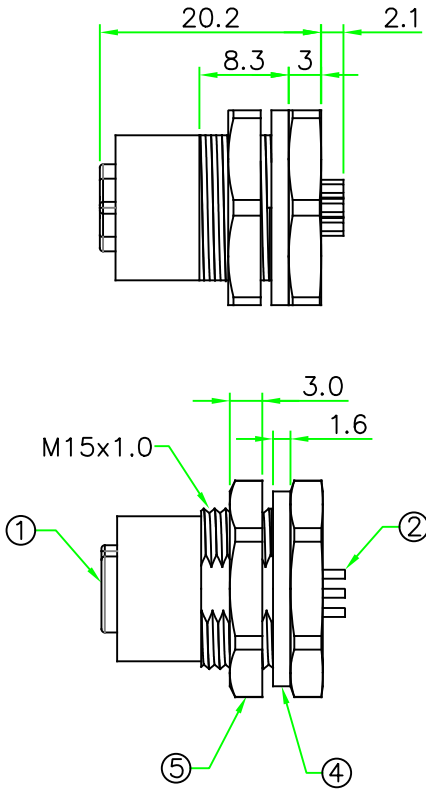


RoHS

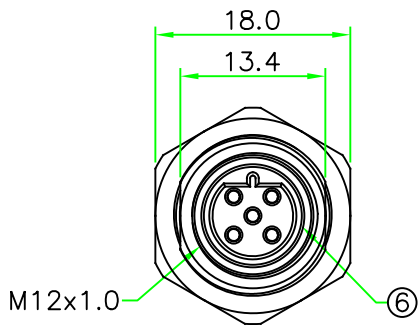

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
VOLTAGE RATING : 2~4P 250V a.c. or d.c.
5P 60V a.c. or d.c.
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - PANEL THICKNESS MAX. 3.0mm
 - HOW TO ORDER: B12D-P2xxHSR
03 - 3 PINS
04 - 4 PINS
05 - 5 PINS

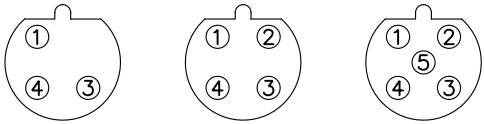

B12D-P203HSR B12D-P204HSR B12D-P205HSR
PIN ASSIGNMENT FRONT VIEW
(前視圖)

6	O-RING	VITON.	BLACK	1	
5	HEX NUT	Nylon+GF.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	GLUE	EPOXY.	BLACK	1	
2	CONTACT	BRASS, 6 u" Gold Plated . Female Contact.		N	
1	CONNECTOR	M12 B-Coding Female Panel Connector Insert. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司				
UNIT: mm	SCALE	1.5:1	TITLE	M12 B-Coding Female Panel Connector All Plastic Rear Mount Hex Flange With Solder Bucket Pin
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°			P/N:	B12D-P2xxHSR
REV.			SHEET	1/1
DWG.NO:			B12D-P2xxHSR	
A			DR. JAMES CH. ERIC AP.	