
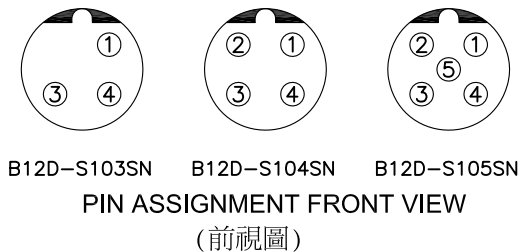



RoHS

IP67

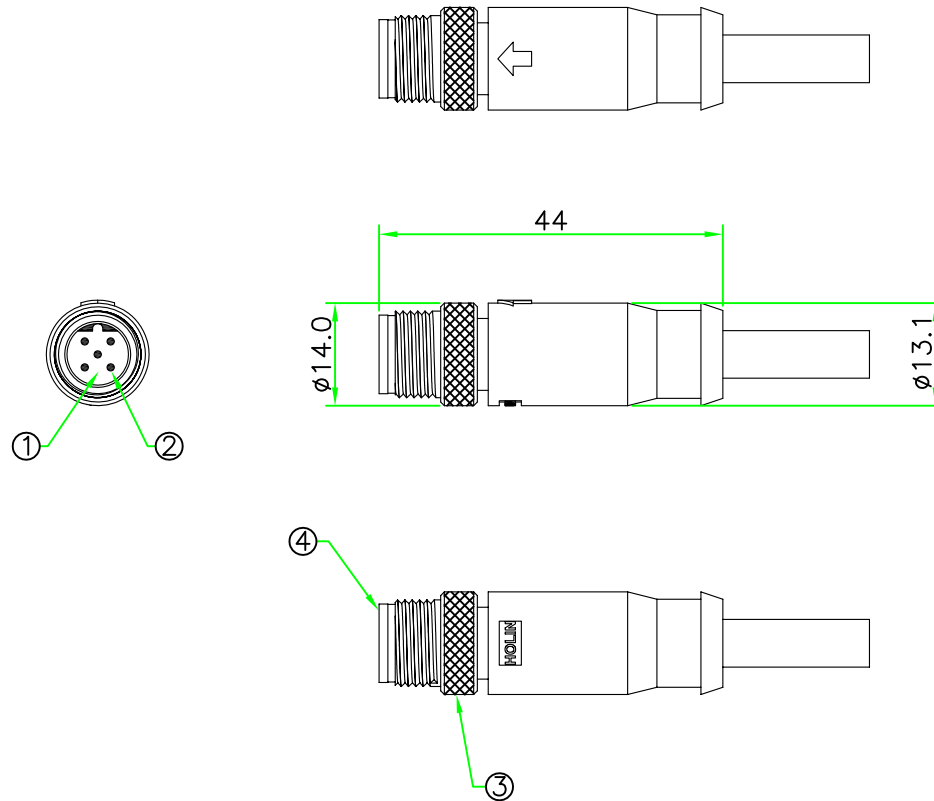

4	METAL SHELL	Brass, Nickel Plated.		1	
3	RING NUT	Brass, Nickel Plated.		1	
2	CONTACT	Brass , 6 u" Gold Plated .Male Contact.		N	
1	CONNECTOR	M12 B-Coding Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV.	DESCRIPTION	DATE
A	ISSUE	Jun/13/2014

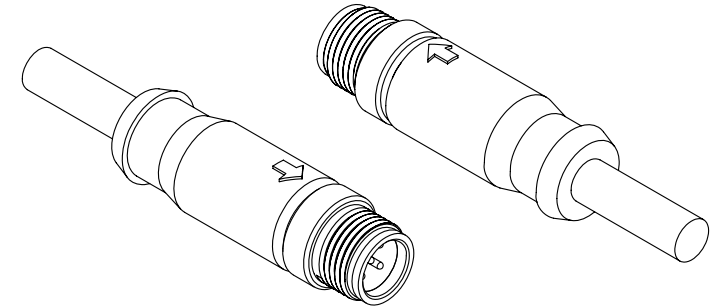

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: B12D-S1xxSN

03 - 3 PIN

04 - 4 PIN

05 - 5 PIN

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT:mm	TITLE	M12 B-Coding Male Shielded Molded Cable Ass'y
SCALE	1:1	P/N:	B12D-S1xxSN
UNLESS OTHERWISE SPECIFIED TOLERANCES:		DR.	Patty
X ± 0.25 XX ± 0.1		CH.	ERIC
XXX ± 0.05 ANGLE ± 1°		AP.	
REV.	A	DWG.NO:	B12D-S1xxSN
SHEET	1/1		