





RoHS

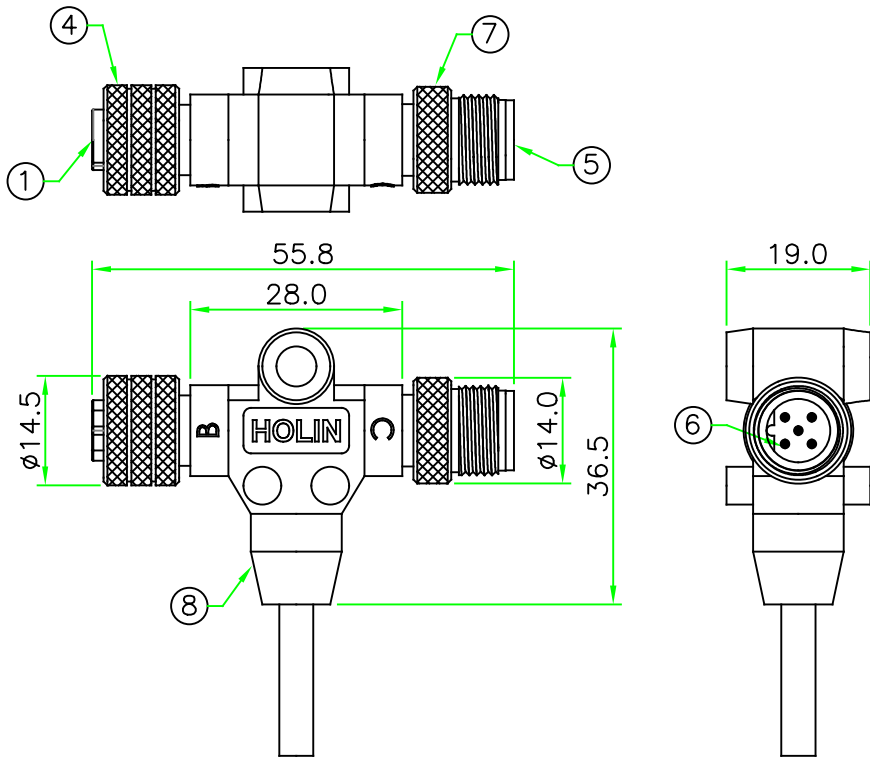

REV.	DESCRIPTION	DATE
A	ISSUE	Jan/22/2025

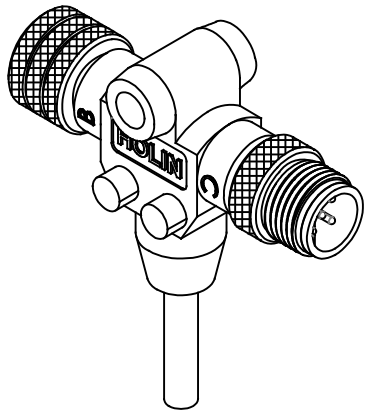

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: B12T-MCFM0xx
22 - 2 PINS
33 - 3 PINS
44 - 4 PINS
55 - 5 PINS
CONNECTOR GENDER

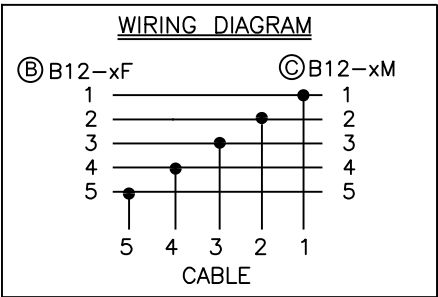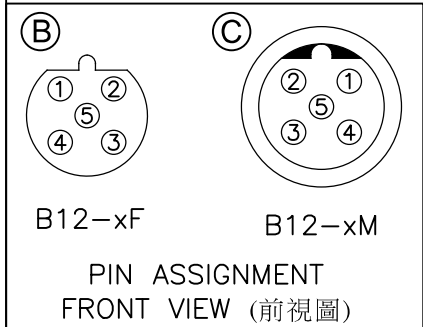

※Cable specification and length can be customized.

8	OVERMOLD	PU.	BLACK	1	
7	RING NUT	Brass. Nickel Plated.		1	
6	CONTACT	Brass. 6u" Gold Plated. Male Pin.		N	
5	CONNECTOR	M12 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
4	RING NUT	Brass. Nickel Plated.		1	
3	O-RING	Viton.	BLACK	1	
2	CONTACT	Brass. 6u" Gold Plated. Female Pin.		N	
1	CONNECTOR	M12 B-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司		UNIT: mm		TITLE M12 B Coding Female To Male Molded Cable	
SCALE 1:1		P/N: B12T-MCFM0xx		DR. SIBYL	
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		DWG.NO: B12T-MCFM0xx		CH. JAMES	
REV. A	SHEET 1/1			AP.	