



RoHS

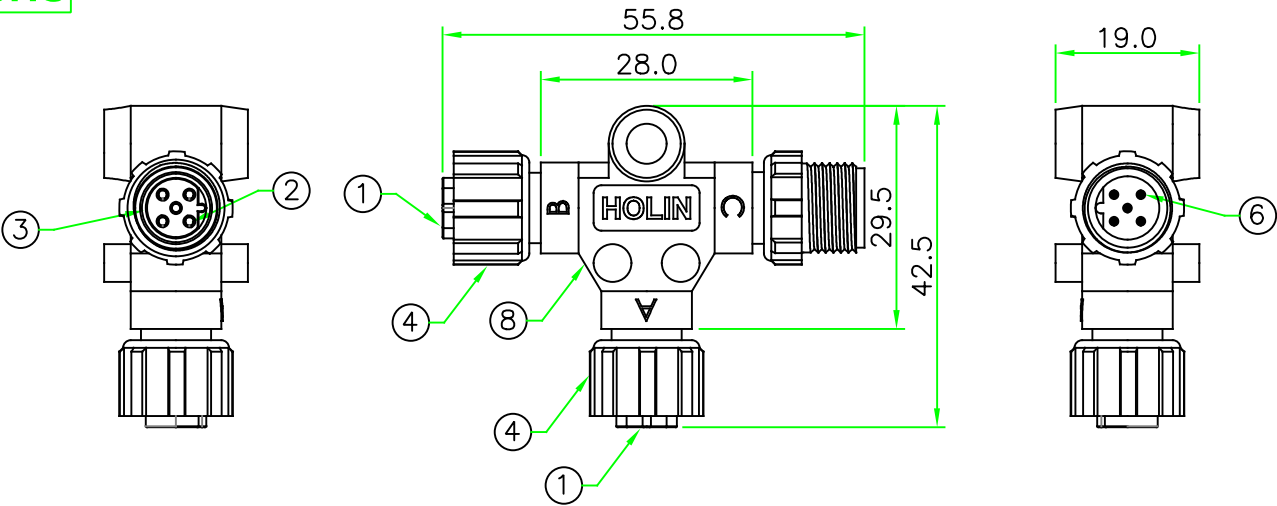


REV.	DESCRIPTION	DATE
A	ISSUE	Jan/21/2025

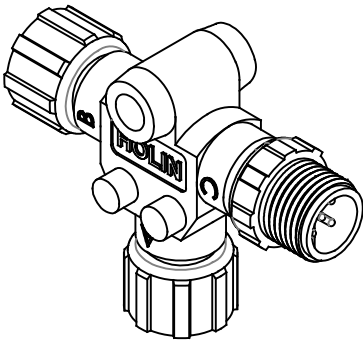


NOTES:

1. HOW TO ORDER: B12T-PFFMxxx

333 - 3 PINS
444 - 4 PINS
555 - 5 PINS

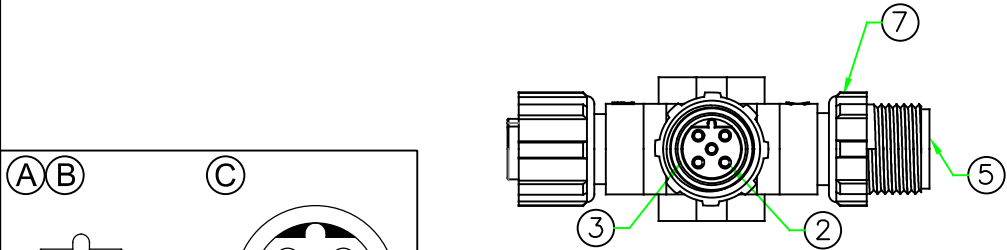

WIRING DIAGRAM

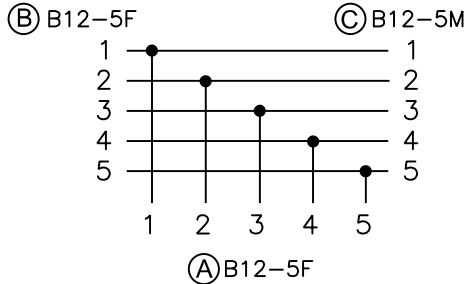

(A) (B)	(C)
B12-xF	B12-xM
PIN ASSIGNMENT FRONT VIEW (前視圖)	

8	OVERMOLD	PU.	BLACK	1	
7	RING NUT	Nylon+GF.	BLACK	1	
6	CONTACT	Brass. 6u" Gold Plated. Male Pin.		N	
5	CONNECTOR	M12 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
4	RING NUT	Nylon+GF.	BLACK	2	
3	O-RING	Viton.	BLACK	2	
2	CONTACT	Brass. 6u" Gold Plated. Female Pin.		N	
1	CONNECTOR	M12 B-Coding Female Connector Insert. Nylon+GF.	BLACK	2	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司		UNIT: mm		TITLE M12 B CODE ALL PLASTIC FEMALE TO FEMALE & MALE T ADAPTER	
SCALE 1:1		P/N: B12T-PFFMxxx		DR. SIBYL	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		REV. A		CH. JAMES	
SHEET 1/1		DWG.NO: B12T-PFFMxxx		AP.	