
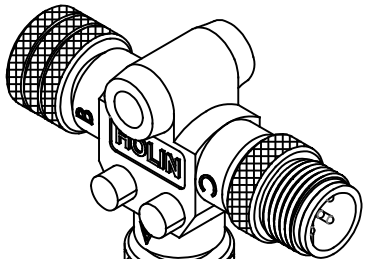
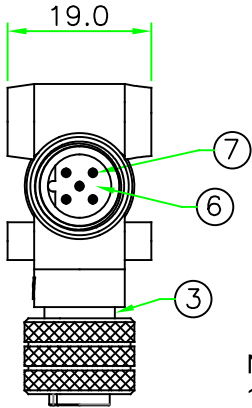





RoHS

| REV. | DESCRIPTION | DATE        |
|------|-------------|-------------|
| A    | ISSUE       | Feb/05/2025 |
|      |             |             |
|      |             |             |

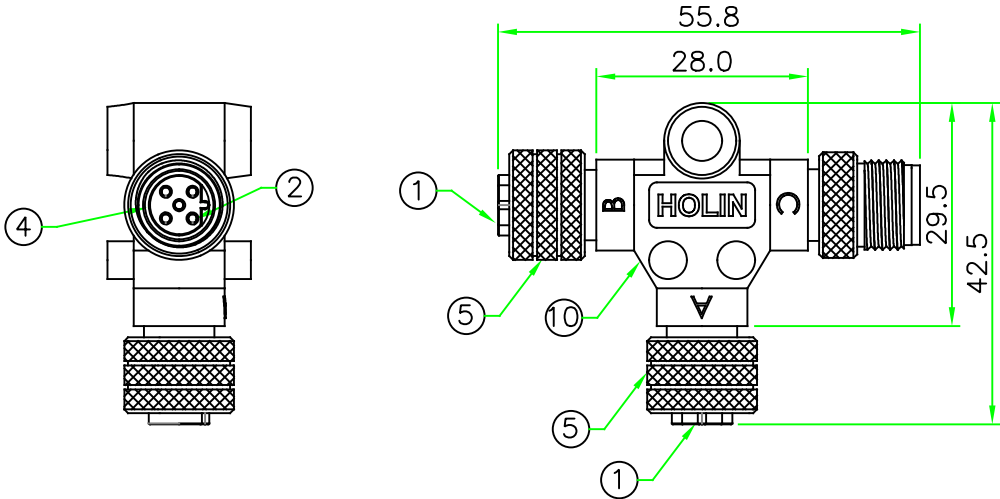

NOTES:  
1. HOW TO ORDER: B12T-SFFMxxx

333 - 3 PINS  
444 - 4 PINS  
555 - 5 PINS

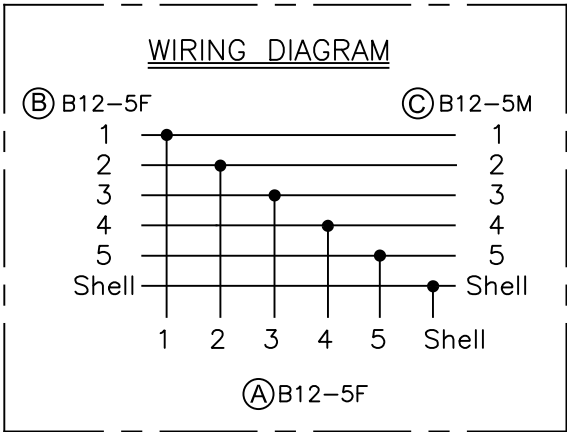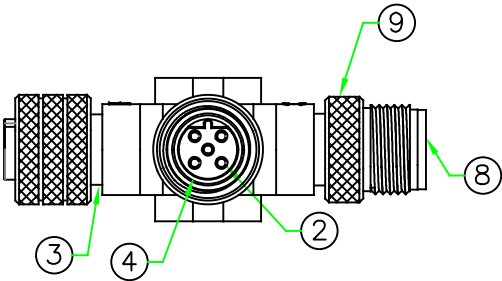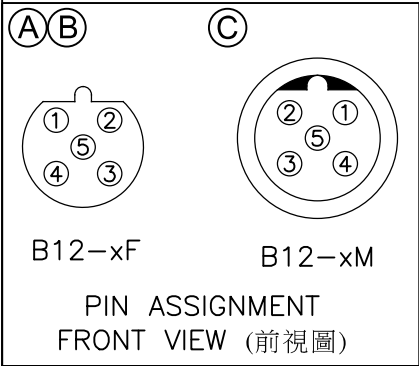

|     |              |                                                 |       |      |         |
|-----|--------------|-------------------------------------------------|-------|------|---------|
| 10  | OVERMOLD     | PU.                                             | BLACK | 1    |         |
| 9   | RING NUT     | Brass. Nickel Plated.                           |       | 1    |         |
| 8   | METAL SHELLE | Brass. Nickel Plated.                           |       | 1    |         |
| 7   | CONTACT      | Brass. 6u" Gold Plated. Male Pin.               |       | N    |         |
| 6   | CONNECTOR    | M12 B-Coding Male Connector Insert. Nylon+GF.   | BLACK | 1    |         |
| 5   | RING NUT     | Brass. Nickel Plated.                           |       | 2    |         |
| 4   | O-RING       | Viton.                                          | BLACK | 2    |         |
| 3   | METAL SHELLE | Brass. Nickel Plated.                           |       | 2    |         |
| 2   | CONTACT      | Brass. 6u" Gold Plated. Female Pin.             |       | N    |         |
| 1   | CONNECTOR    | M12 B-Coding Female Connector Insert. Nylon+GF. | BLACK | 2    |         |
| No. | PART NAME    | DESCRIPTION                                     | COLOR | Q'TY | REMARKS |

|                                                                                                     |           |                                                                   |           |
|-----------------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------|-----------|
| HOLIN® HTP ASIA TECHNOLOGY CO., LTD.<br>禾凌科技股份有限公司                                                  |           | TITLE<br>M12 B CODE SHIELDED<br>FEMALE TO FEMALE & MALE T ADAPTER |           |
| UNIT: mm                                                                                            | SCALE     | P/N:                                                              | DR. SIBYL |
| UNLESS OTHERWISE SPECIFIED TOLERANCES:<br>XX, ± 0.5<br>.X ± 0.5 .XX ± 0.25<br>.XXX ± 0.1 ANGLE ± 1° | 1:1       | B12T-SFFMxxx                                                      | CH. JAMES |
| REV. A                                                                                              | SHEET 1/1 | DWG.NO:<br>B12T-SFFMxxx                                           | AP.       |