

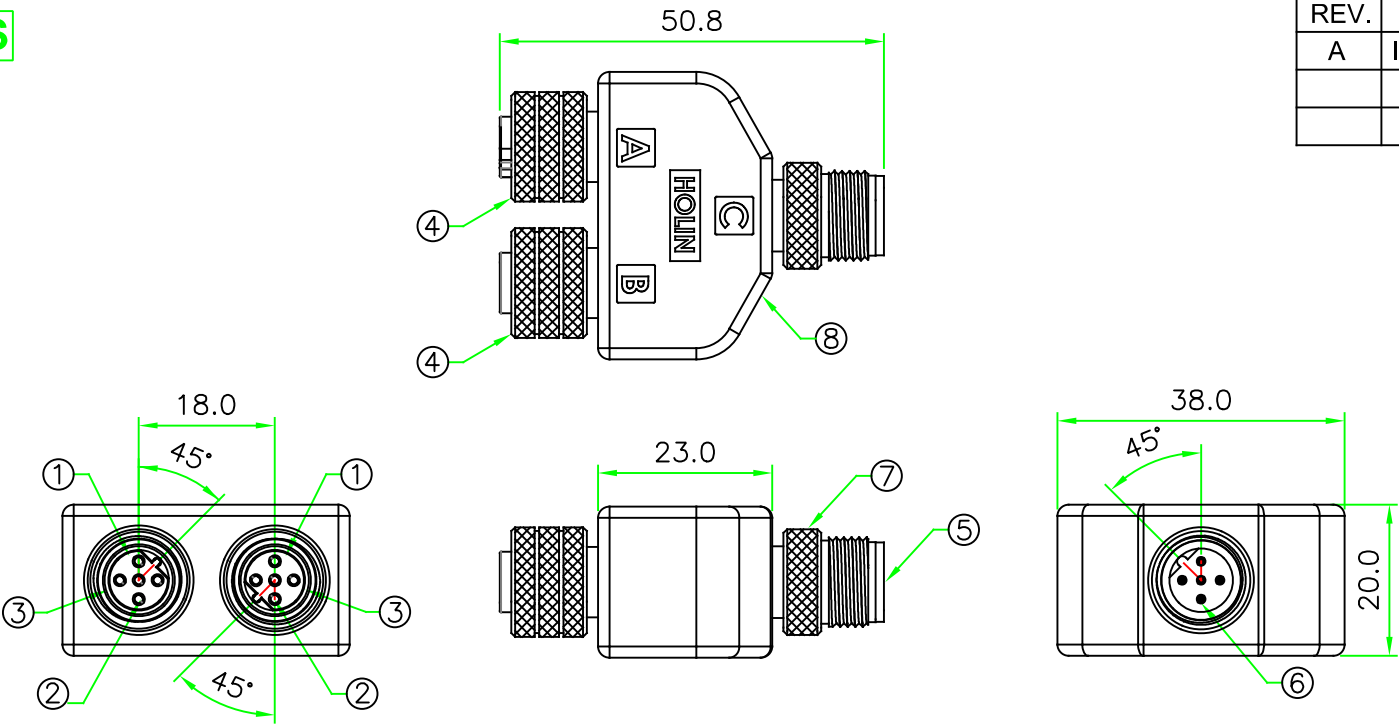


RoHS


REV.	DESCRIPTION	DATE
A	ISSUE	Jan/21/2025

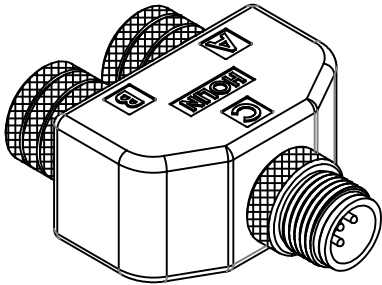

WIRING DIAGRAM

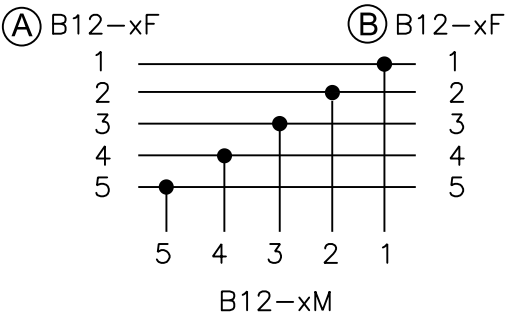

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: B12YB-MFFMxxx
- CONNECTOR GENDER
- 333 - 3 PINS
 - 444 - 4 PINS
 - 555 - 5 PINS

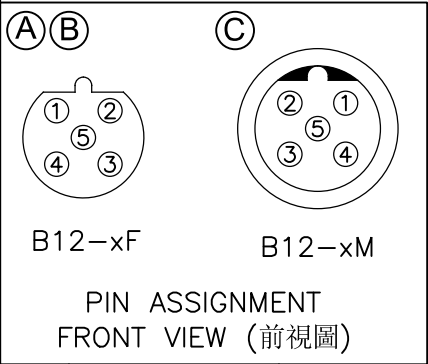

8	OVERMOLD	PU.	BLACK	1	D29	HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司	
7	RING NUT	Brass. Nickel Plated.		1			
6	CONTACT	Brass. 6u" Gold Plated.		N		UNIT: mm	TITLE M12 B Code
5	CONNECTOR	M12 B-Coding Male Pin Connector Insert. Nylon+GF.	BLACK	1		SCALE 1:1	Female/Female to Male Y Splitter
4	RING NUT	Brass. Nickel Plated.		2		UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°	
3	O-RING	Viton.	BLACK	2			
2	CONTACT	Brass. 6u" Gold Plated. Female Pin.		N		P/N: B12YB-MFFMxxx	DR. SIBYL
1	CONNECTOR	M12 B-Coding Female Pin Connector Insert. Nylon+GF.	BLACK	2		DWG.NO: B12YB-MFFMxxx	CH. JAMES
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV. A	AP.