

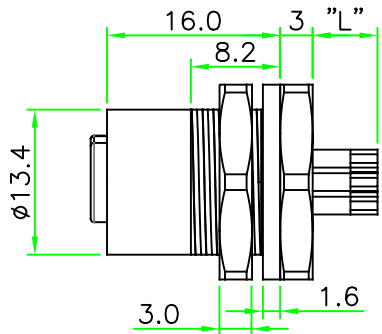



Note: Hex nut & gasket does not come packaged separately
(Hex nut & gasket不組裝另外包裝)

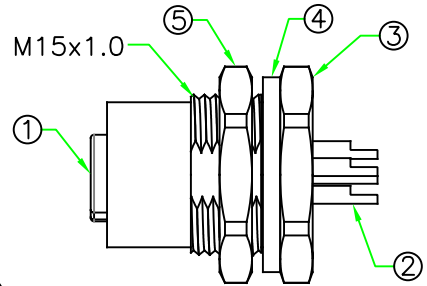


PART NUMBER	Length "L"
C12D-M2xxHSR	3.95mm
C12N-M2xxHSR	6.0mm


RoHS



REV.	DESCRIPTION	DATE
A	ISSUE	Dec/23/2025

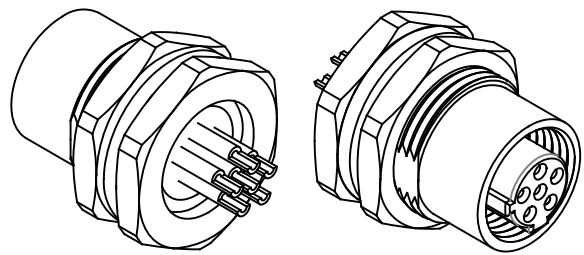

- NOTES:
- 1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 3~4P 4A / 5~6P 2A
VOLTAGE RATING: 3~4P 250V a.c. or d.c.
5P 60V a.c. or d.c.
6P 30V a.c. or d.c.
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 2. PANEL THICKNESS : 3mm Max.
 - 3. HOW TO ORDER: C12x-M2xxHSR
 - 03 - 3 PINS
 - 04 - 4 PINS
 - 05 - 5 PINS
 - 06 - 6 PINS
 - N - CURRENT RATING 2A
 - D - CURRENT RATING 4A

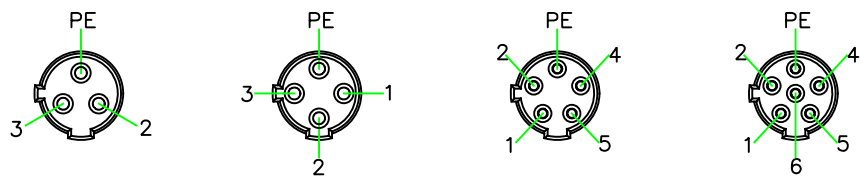

C12D-M203HSR C12D-M204HSR C12N-M205HSR C12N-M206HSR

PIN ASSIGNMENT FRONT VIEW (前視圖)

7	O-RING	VITON.	BLACK	1	
6	GLUE	Epoxy.	BLACK	1	
5	HEX NUT	BRASS, Nickel Plated.		1	
4	GASKET	EPDM.	BLACK	1	
3	HOUSING	BRASS, Nickel Plated.		1	
2	CONTACT	BRASS , 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 C-Coding Female Connector Insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司				
		UNIT: mm	TITLE M12 C-Coding Female Connector Rear Mount Hex Flange Solder Bucket Pin	
\$SCALE		1.5:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°			P/N: C12x-M2xxHSR	DR. JAMES
				CH. ERIC
REV. A	SHEET 1/1	DWG.NO: C12x-M2xxHSR	AP.	