



RoHS

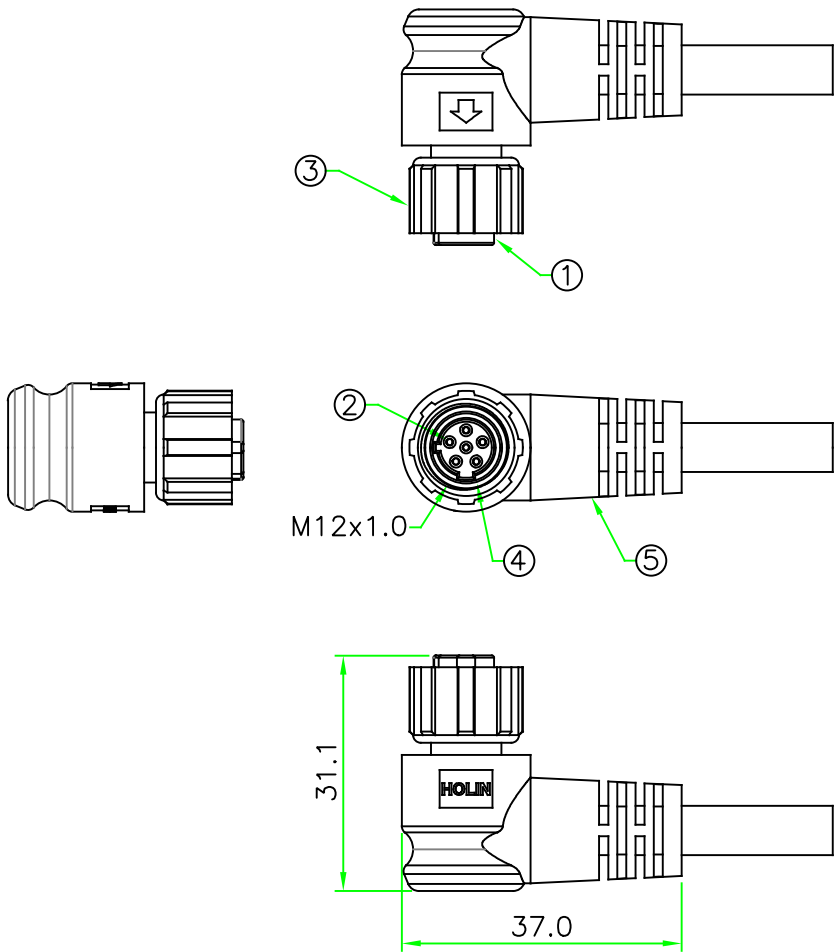

REV.	DESCRIPTION	DATE
A	ISSUE	Feb/13/2025

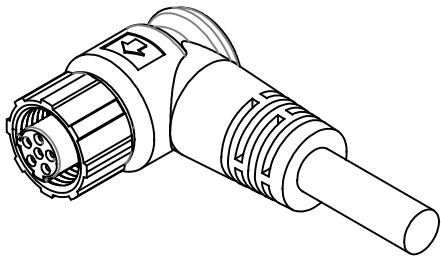

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A/4A

TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: C12x-P2xxRM

03 - 3 PINS


04 - 4 PINS

05 - 5 PINS.

06 - 6 PINS

N - CURRENT RATING 2A

D - CURRENT RATING 4A



C12D-P203RM C12D-P204RM C12N-P205RM C12N-P206RM

PIN ASSIGNMENT FRONT VIEW (前視圖)

※Cable specification and length can be customized.

5	OVERMOLD	PU or PVC.	BLACK	1	90-135
4	O-RING	Viton.	BLACK	1	
3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 C-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : M12 C-Coding Female All Plastic R/A Molded Cable			
SCALE	1:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N: C12x-P2xxRM		DR. SIBYL	
REV. A		SHEET 1/1		CH. JAMES	
		DWG.NO: C12x-P2xxRM		AP.	