
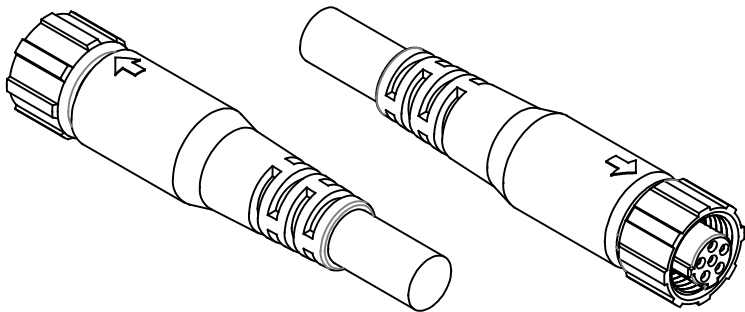
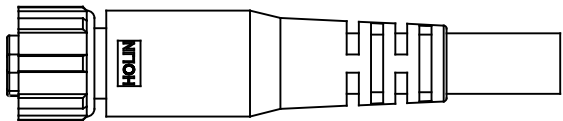
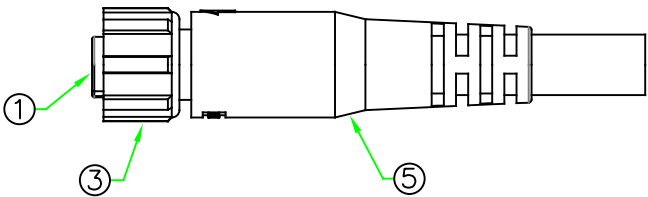



RoHS

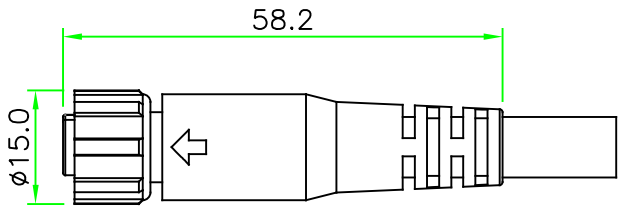

NOTES:


1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A/4A
TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

2. HOW TO ORDER: C12x-P2xxSM

03 - 3 PINS
04 - 4 PINS
05 - 5 PINS.
06 - 6 PINS

N - CURRENT RATING 2A
D - CURRENT RATING 4A



C12D-P203SM C12D-P204SM C12N-P205SM C12N-P206SM

PIN ASSIGNMENT FRONT VIEW (前視圖)

※Cable specification and length can be customized.

5	OVERMOLD	PU or PVC.	BLACK	1	98-135
4	O-RING	Viton.	BLACK	1	
3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 C-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE : M12 C-Coding Female All Plastic Molded Cable			
SCALE		1:1		P/N: C12x-P2xxSM	
UNLESS OTHERWISE SPECIFIED TOLERANCES:		XX. ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		DR. SIBYL	
REV. A		SHEET 1/1		CH. JAMES	
DWG.NO: C12x-P2xxSM				AP.	