
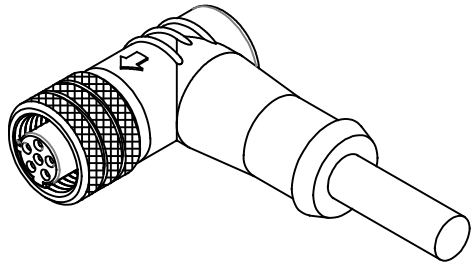


RoHS

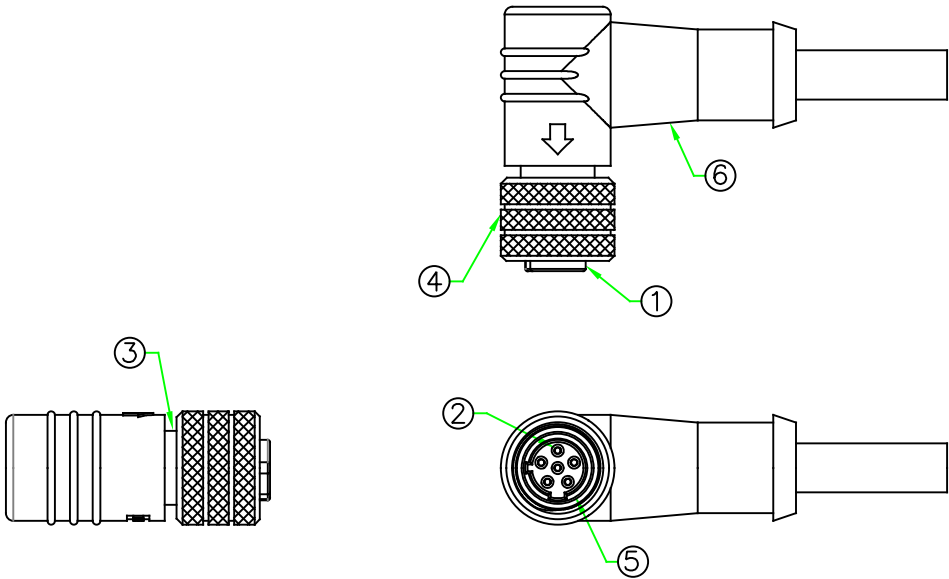

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A/4A

TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: C12x-S2xxRN

03 - 3 PINS


04 - 4 PINS

05 - 5 PINS.


06 - 6 PINS

N - CURRENT RATING 2A


D - CURRENT RATING 4A

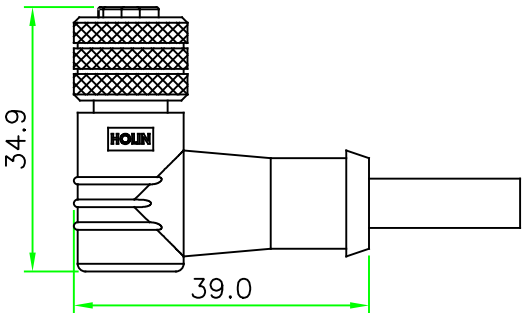

*Cable specification and length can be customized.



C12D-S203RN



C12D-S204RN



C12N-S205RN



C12N-S206RN

PIN ASSIGNMENT FRONT VIEW (前視圖)

6	OVERMOLD	PU or PVC.	BLACK	1	202-135
5	O-RING	Viton.	BLACK	1	
4	RING NUT	Brass, Nickel Plated.		1	
3	METAL SLEEVE	Brass, Nickel Plated.		1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 C-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : M12 C-Coding Female Shielded R/A Molded Cable
SCALE 1:1	P/N: C12x-S2xxRN	DR. SIBYL
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°	DWG.NO: C12x-S2xxRN	CH. JAMES
REV. A	SHEET 1/1	AP.