

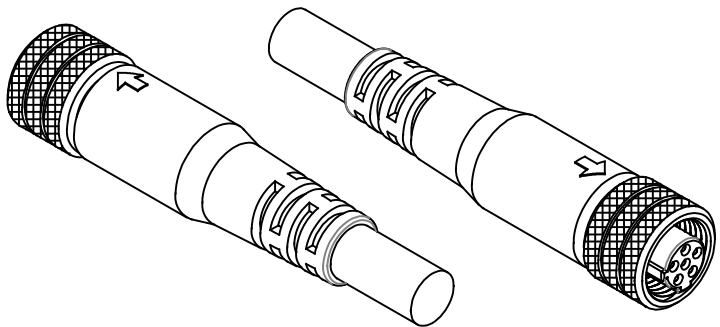
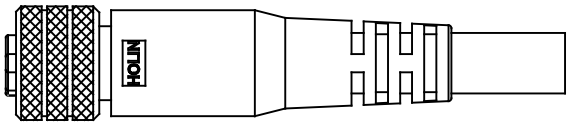
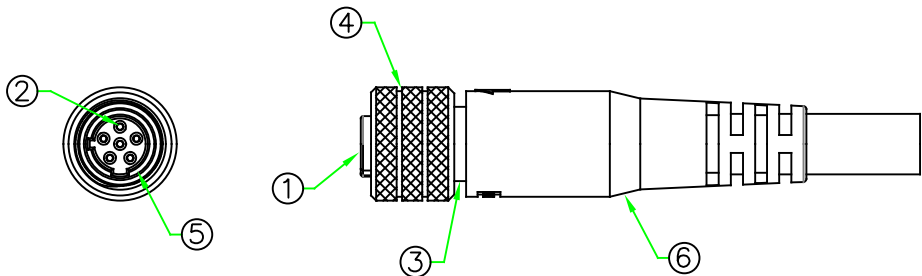


RoHS

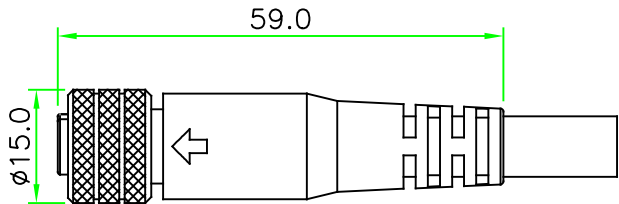

NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A/4A
TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: C12x-S2xxSM

03 - 3 PINS
04 - 4 PINS
05 - 5 PINS.
06 - 6 PINS
N - CURRENT RATING 2A
D - CURRENT RATING 4A

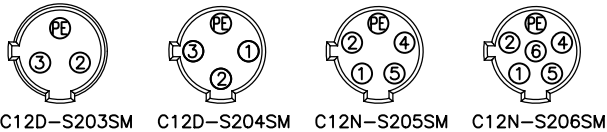

PIN ASSIGNMENT FRONT VIEW (前視圖)

*Cable specification and length can be customized.

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

6	OVERMOLD	PU or PVC.	BLACK	1	98-135
5	O-RING	Viton.	BLACK	1	
4	RING NUT	Brass, Nickel Plated.		1	
3	METAL SLEEVE	Brass, Nickel Plated.		1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 C-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT: mm	TITLE :	M12 C-Coding Female Shielded Molded Cable
SCALE	1:1	P/N:	C12x-S2xxSM
UNLESS OTHERWISE SPECIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°	REV.	DWG.NO:	C12x-S2xxSM
A	SHEET 1/1	DR.	SIBYL
		CH.	JAMES
		AP.	