


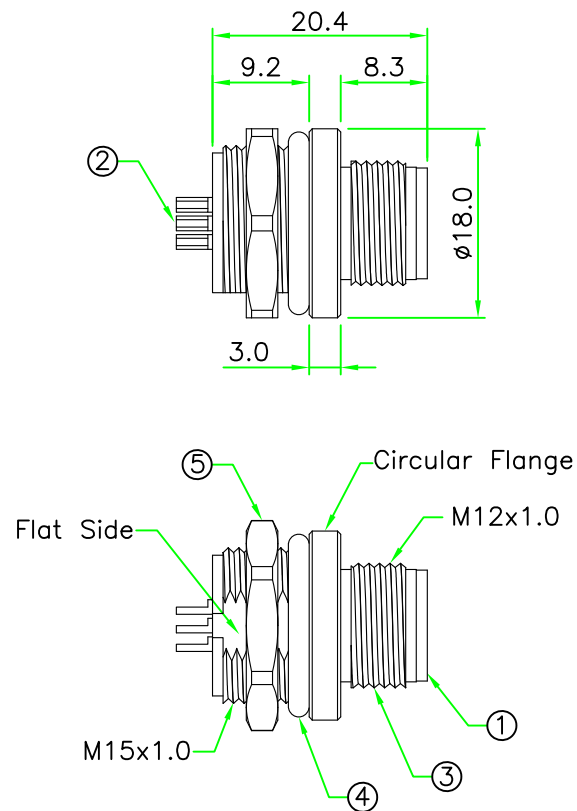


RoHS
IP66~68

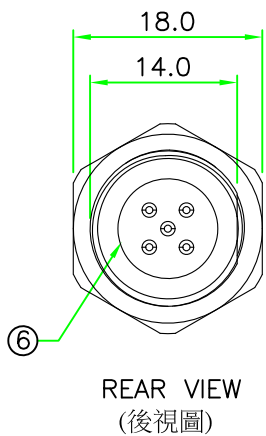

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/10/2019

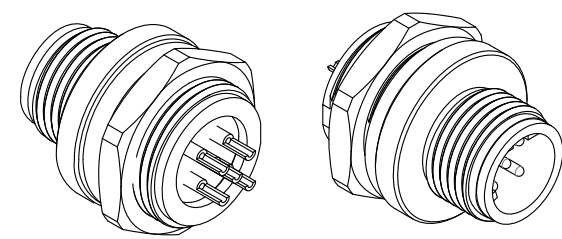

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: D12D-M1xxCSF
03 - 3 PINS
04 - 4 PINS
05 - 5 PINS



6	GLUE	Epoxy.	BLACK	1	
5	HEX NUT	Brass, Nickel Plated.		1	
4	O-RING	Silicon.	BROWN	1	
3	HOUSING	Brass, Nickel Plated.		1	
2	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	M12 D-Coding Male Connector Insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
UNIT: mm	TITLE :	M12 D-Coding Male Panel Front Mount Circular Flange Solder Bucket Pin Connector	
SCALE 1.5:1	P/N:	D12D-M1xxCSF	DR. SIBYL
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.5 XX ±0.25 XXX ±0.1 ANGLE ± 1°	DWG.NO:	D12D-M1xxCSF	CH. ERIC
REV. A	SHEET 1/1		AP.