


Recommended
Panel Cut Out





RoHS



PCB LAYOUT


Note: Hex nut & gasket does not come packaged separately

(Hex nut & gasket不組裝另外包裝)

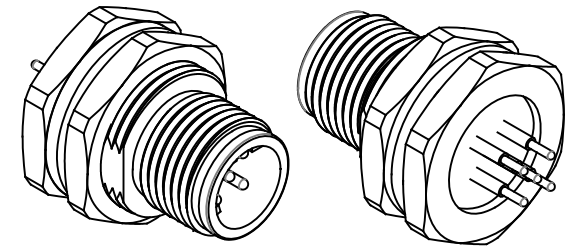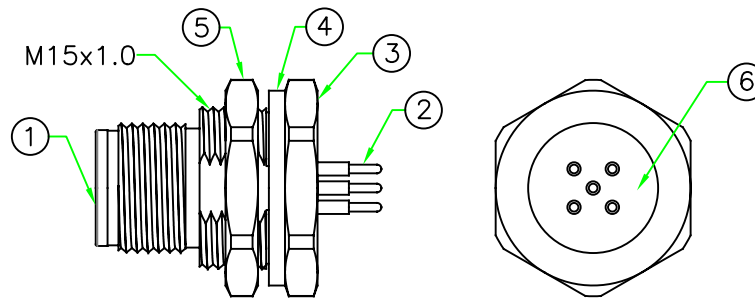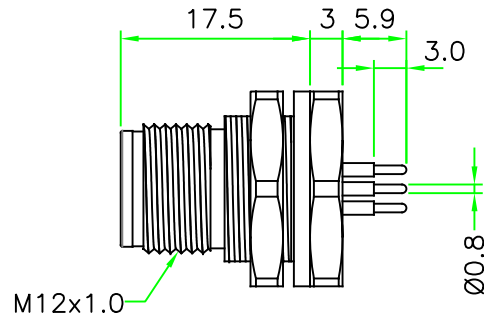



- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - PANEL THICKNESS MAX. 3.0mm
 - HOW TO ORDER: D12D-M1xxHPR

03 - 3 PINS
04 - 4 PINS
05 - 5 PINS

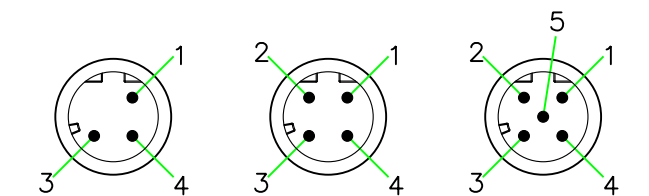

D12D-M104HPR D12D-M104HPR D12D-M105HPR

PIN ASSIGNMENT FRONT VIEW (前視圖)



6	GLUE	Epoxy.	BLACK	1	
5	HEX NUT	BRASS. Nickel Plated.		1	
4	GASKET	EPDM.	BLACK	1	
3	METAL BODY	BRASS. Nickel Plated.		1	
2	CONTACT	BRASS. 6u" Gold Plated.	BLACK	N	
1	CONNECTOR	M12 D-Coding Male Connector Insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE	M12 D-Coding Male Connector Rear Mount Hex Flange PCB Pin
SCALE 1.5:1	P/N:	D12D-M1xxHPR
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°	DR. James	
REV. A1	CH. Eric	
SHEET 1/1	DWG.NO:	D12D-M1xxHPR