
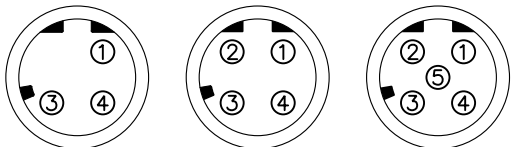
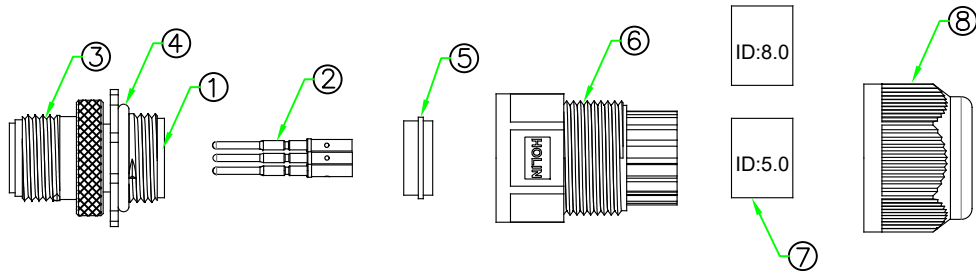
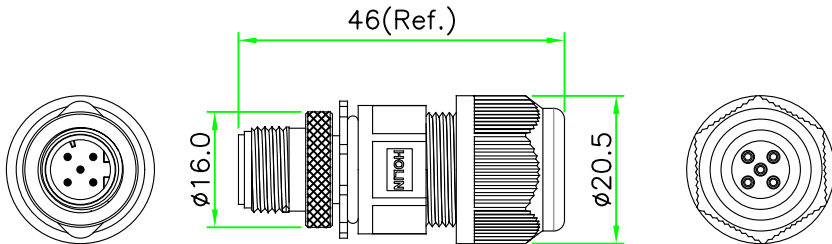



RoHS

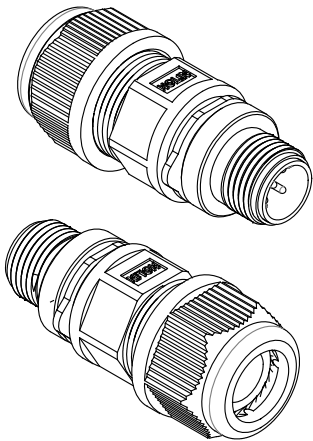

D12D-M103SAC D12D-M104SAC D12D-M105SAC
PIN ASSIGNMENT FRONT VIEW
(前視圖)

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/04/2025

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
VOLTAGE RATING : 250V (3~4P), 60V (5P) ac or dc.
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: D12D-M1xxSAC
- 03 - 3 PINS
 - 04 - 4 PINS
 - 05 - 5 PINS

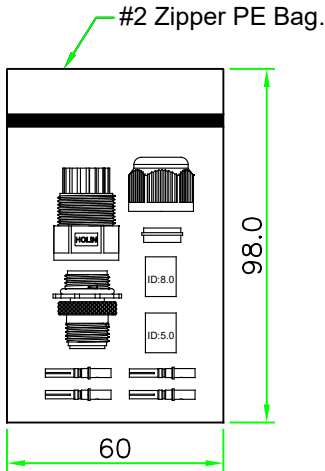

8	CLAMP NUT	NYLON+GF	BLACK	1		HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
7	TUBE	EPDM, (ID= 5.0 & 8.0mm.)	BLACK	2		M12 D-Coding Male Connector Crimp Type Field Installable Plug with Male Crimp Pin					
6	HOOD	NYLON	BLACK	1							
5	GASKET	SILICON.	BLACK	1			UNIT: mm	P/N: D12D-M1xxSAC DR. JAMES			
4	O-RING	SILICON.	BLACK	1		\$SCALE	1:1				CH. ERIC
3	RING NUT	BRASS. Nickel Plated.		1		UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx. ± 0.5 .x ± 0.5 .xx ± 0.25 .xxx± 0.1 ANGLE ± 1°			AP.		
2	CONTACT	BRASS ,Male Pin. 6u"Gold Plated.		N							
1	CONNECTOR	M12 D-Code Male Connector Insert, NYLON+GF.	BLACK	1		REV.	SHEET	DWG.NO: D12D-M1xxSAC			
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	1/1				