
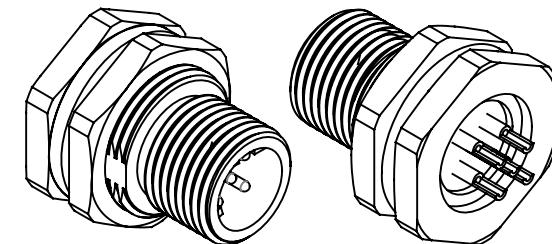
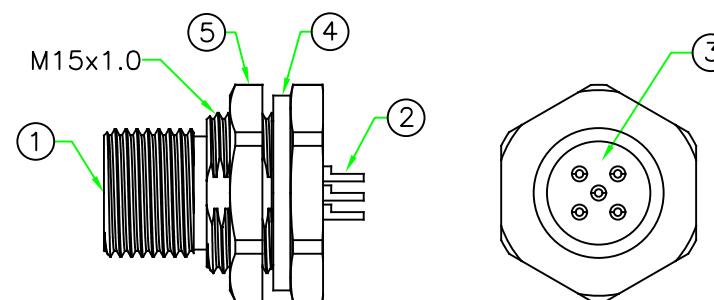



Note: Hex nut & gasket are not assembled, packaged separately.  
(Hex nut & gasket 不組裝, 另外包裝)


RoHS

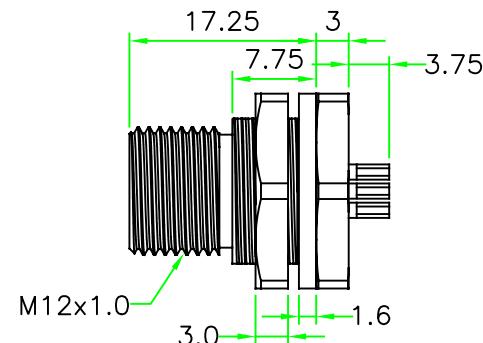

NOTES:


- ELECTRICAL CHARACTERISTICS:  
CURRENT RATING: 4A  
TEMPERATURE RANGE: -25°C TO +85°C  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- PANEL THICKNESS MAX. 3.0mm
- HOW TO ORDER: D12D-P1xxHSR

03 - 3 PINS  
04 - 4 PINS  
05 - 5 PINS

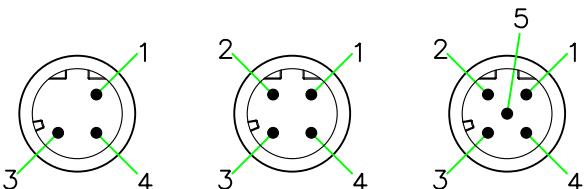

D12D-P103HSR D12D-P104HSR D12D-P105HSR

PIN ASSIGNMENT FRONT VIEW (前視圖)



PCB LAYOUT

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
5	HEX NUT	Nylon+GF.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	GLUE	Epoxy.	BLACK	1	
2	CONTACT	BRASS. 6u" Gold Plated. Male Pin.		N	
1	CONNECTOR	M12 D-Coding Panel Male Connector Insert. Nylon+GF.	BLACK	1	

**HOLIN**® HTP ASIA TECHNOLOGY CO., LTD.  
禾凌科技股份有限公司

UNIT: mm  
SCALE 1.5:1  
TITLE: M12 D-Coding Panel Male Connector  
All Plastic Rear Mount Hex Flange Solder Pin

UNLESS OTHERWISE  
SPECIFIED TOLERANCES:  
xx. ± 0.5  
.x ± 0.5 .xx ± 0.25  
.xxx ± 0.1 ANGLE ± 1°  
P/N: D12D-P1xxHSR  
DR. James  
CH. Eric

REV. A SHEET 1/1  
DWG.NO: D12D-P1xxHSR  
AP.