




RoHS 機密

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/09/2025

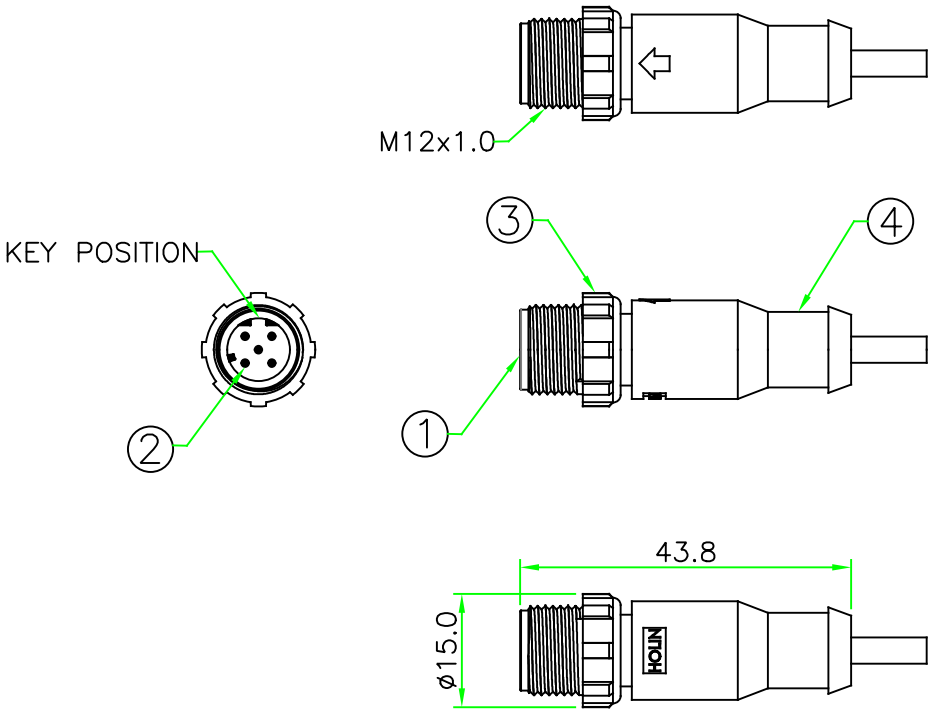

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: D12D-P1xxSN
03 - 3 PINS
04 - 4 PINS
05 - 5 PINS

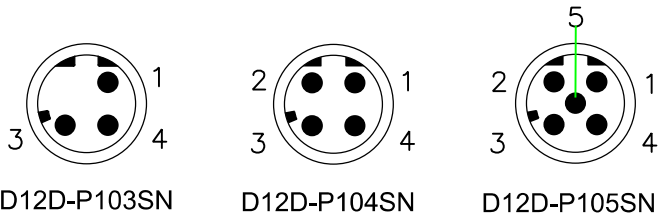

Pin Assignment Front View(前視圖)

4	OVERMOLD	PU or PVC.	BLACK	1	98-135
3	RING NUT	NYLON+GF.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	M12 D-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE : M12 D-Coding Male All Plastic R/A Molded Cable			
SCALE 1:1		P/N: D12D-P1xxSN		DR. RUBY	
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		DWG.NO: D12D-P1xxSN		CH. SIBYL	
REV. A	SHEET 1/1			AP.	