
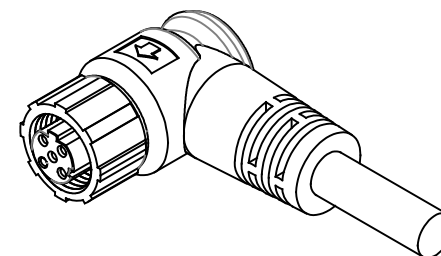


RoHS


REV.	DESCRIPTION	DATE
A	ISSUE	Mar/05/2025

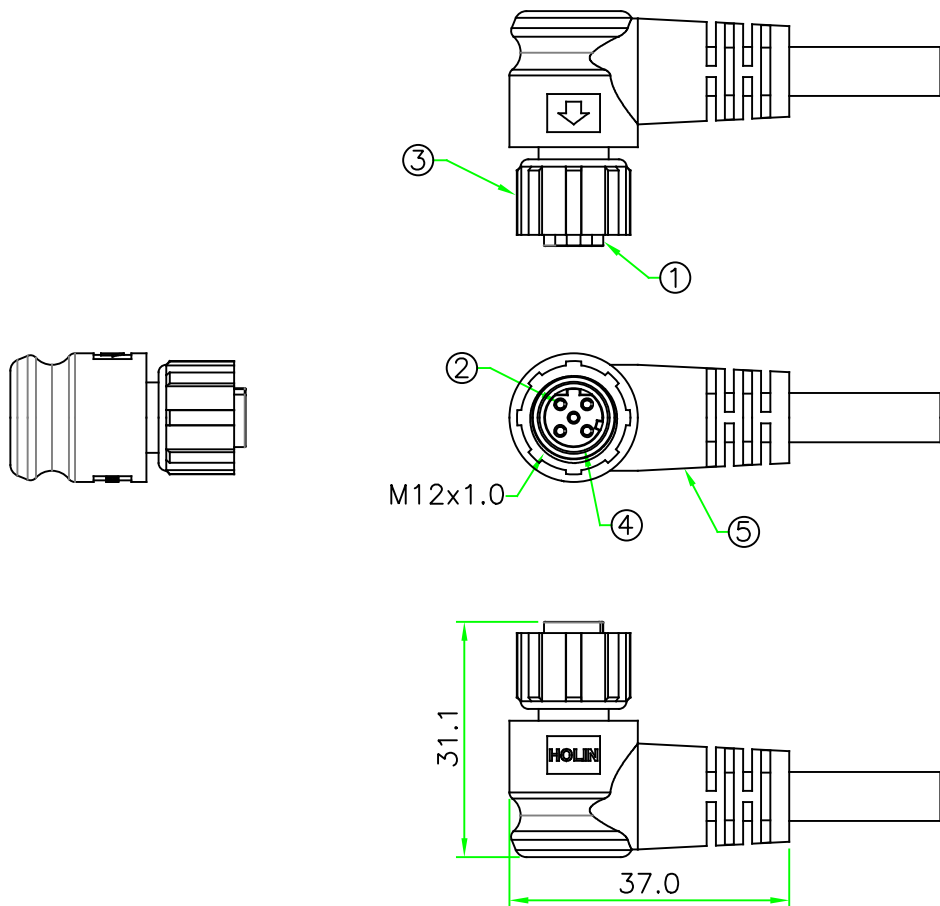


NOTES:

- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- HOW TO ORDER: D12D-P2xxRM


- 03 - 3 PINS
- 04 - 4 PINS
- 05 - 5 PINS



D12D-P203RM



D12D-P204RM



D12D-P205RM

PIN ASSIGNMENT FRONT VIEW (前視圖)

*Cable specification and length can be customized.

5	OVERMOLD	PU or PVC.	BLACK	1	90-135
4	O-RING	Viton.	BLACK	1	
3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 D-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : M12 D-Coding Female
SCALE	1:1	All Plastic R/A Molded Cable
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N: D12D-P2xxRM
REV. A	SHEET 1/1	DWG.NO: D12D-P2xxRM
		DR. SIBYL CH. JAMES AP.