
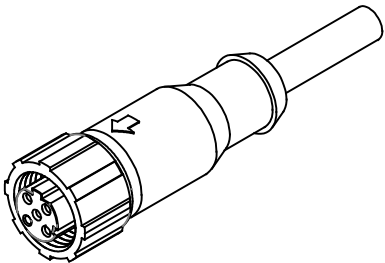


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Mar/05/2025

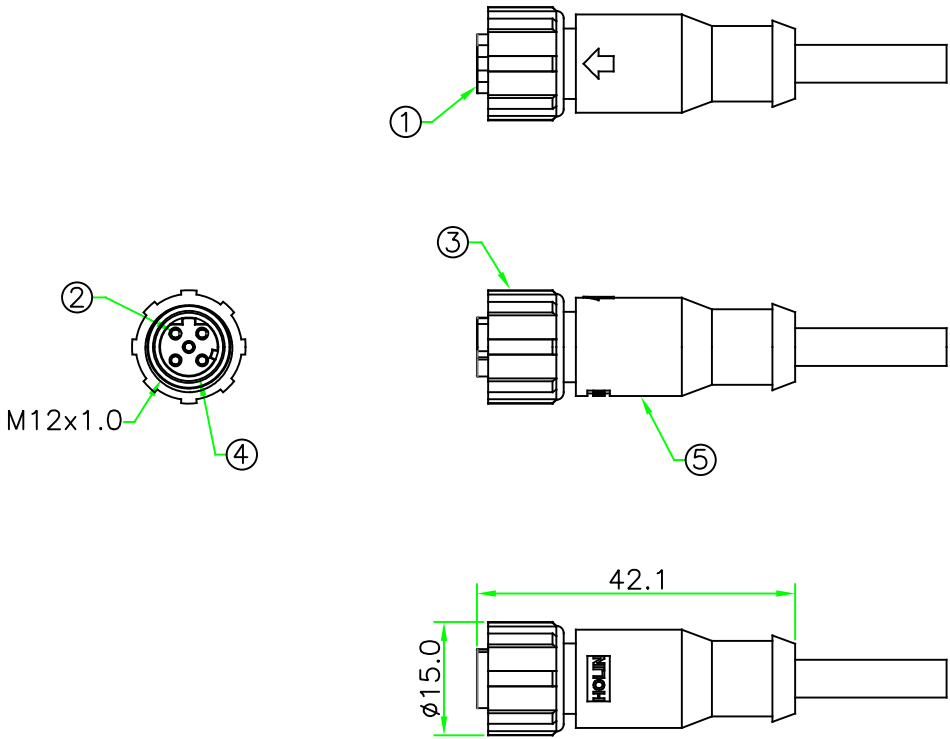

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: D12D-P2xxSN
- 03 - 3 PINS
04 - 4 PINS
05 - 5 PINS

D12D-P203SN	D12D-P204SN	D12D-P205SN
PIN ASSIGNMENT FRONT VIEW (前視圖)		

※Cable specification and length can be customized.

5	OVERMOLD	PU or PVC.	BLACK	1	98-135
4	O-RING	Viton.	BLACK	1	
3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 D-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : M12 D-Coding Female All Plastic Molded Cable			
SCALE	1:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N: D12D-P2xxSN		DR. SIBYL	
REV. A		SHEET 1/1		CH. JAMES	
		DWG.NO: D12D-P2xxSN		AP.	