
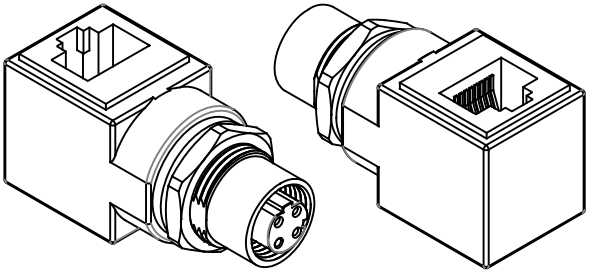



RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/12/2023

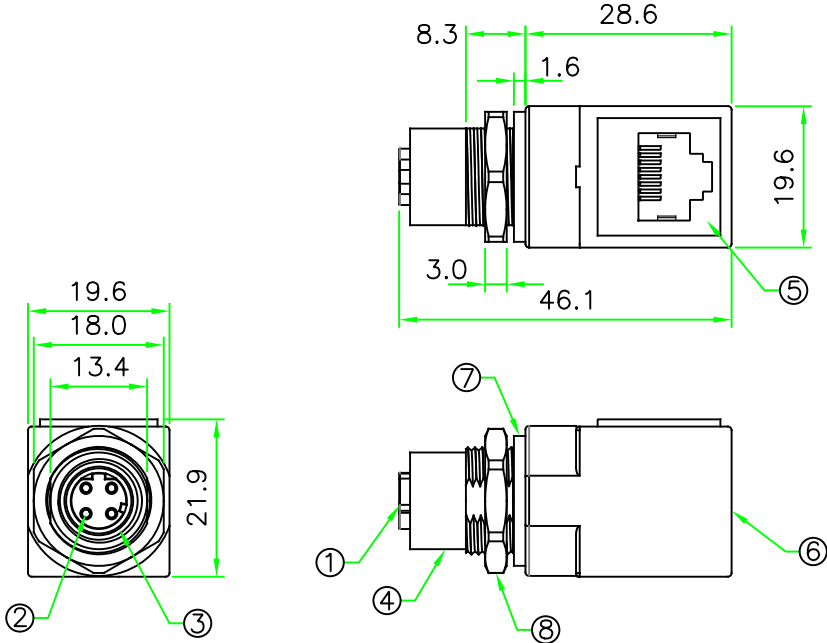


WIRING DIAGRAM

M12D-4F	RJ45 JACK
1	1
2	3
3	2
4	6
	NC 4
	NC 5
	NC 7
	NC 8
Shell	Shell

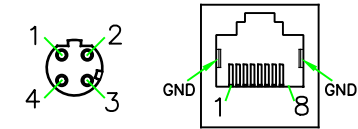

PIN ASSIGNMENT FRONT VIEW
(前視圖)

8	HEX NUT	BRASS. Nickel Plated.		1		HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
7	GASKET	EPDM.	BLACK	1		<div>UNIT: mm</div> <div>TITLE : M12 D-Coding 4P Female to RJ45 8P8C Jack Adapter</div>			
6	OVERMOLD	PU.	BLACK	1					
5	CONNECTOR	RJ45 8P8C JACK.		1		SCALE		1:1	<div>P/N: D12RJL-MFF48</div> <div>DR. James</div> <div>CH. Eric</div> <div>DWG.NO: D12RJL-MFF48</div> <div>AP.</div>
4	METAL BODY	BRASS. Nickel Plated.		1		UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°			
3	O-RING	VITON.	BLACK	1					
2	CONTACT	BRASS. 6u" Gold Plated. Female Pin.		4					
1	CONNECTOR	M12 D-Coding Female 4 Pin Connector Insert.Nylon+GF.	BLACK	1		REV.	SHEET		
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	1/1		