



RoHS

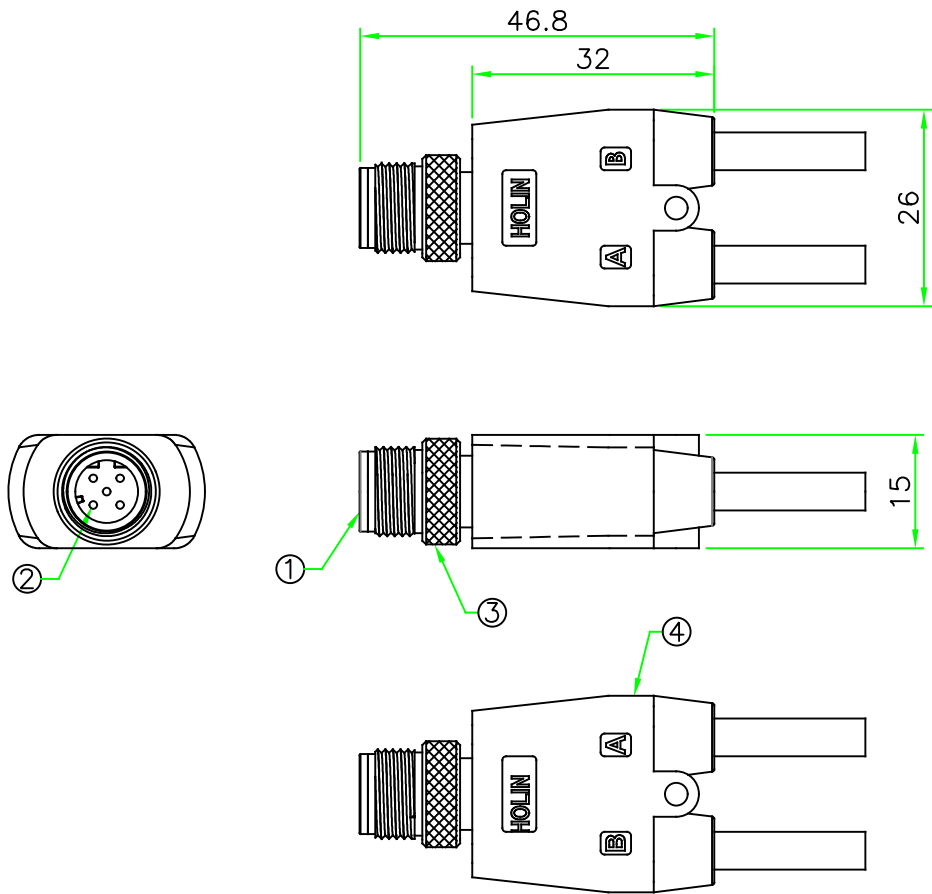

REV.	DESCRIPTION	DATE
A	ISSUE	Mar/05/2025

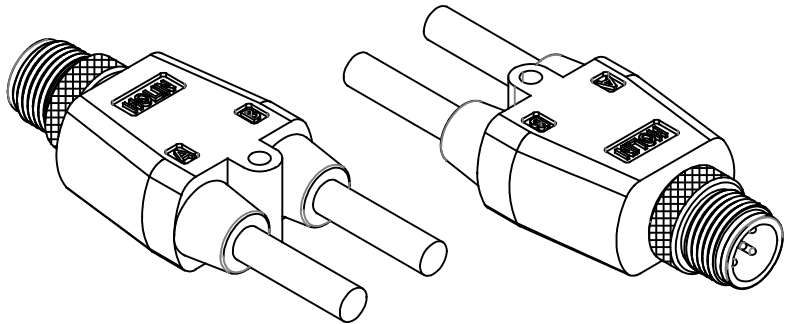

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 4A

TEMPERATURE RANGE: -25°C TO +85°C


DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. HOW TO ORDER: D12Y-MMCCxx00

- 02 - 2 PINS
- 03 - 3 PINS
- 04 - 4 PINS
- 05 - 5 PINS


※Cable specification and length can be customized.




D12Y-MMCC0200



D12Y-MMCC0300



D12Y-MMCC0400



D12Y-MMCC0500

PIN ASSIGNMENT FRONT VIEW (前視圖)

4	OVERMOLD	PU or PVC.	BLACK	1	29-135-N3
3	RING NUT	Brass, Nickel Plated.		1	
2	CONTACT	Brass , 6u" Gold Plated. Male Pin.		N	
1	CONNECTOR	M12 D-Coding Male Connector Insert, Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : M12 D-Coding Male Y-Split Molded Cable Ass'y		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:		DR. SIBYL	
XX, ±1.0		D12Y-MMCCxx00		CH. JAMES	
.X ±1.0 .XX ±0.5					
.XXX ±0.25 ANGLE ± 1°					
REV.		SHEET	DWG.NO:		AP.
A		1/1	D12Y-MMCCxx00		