



RoHS

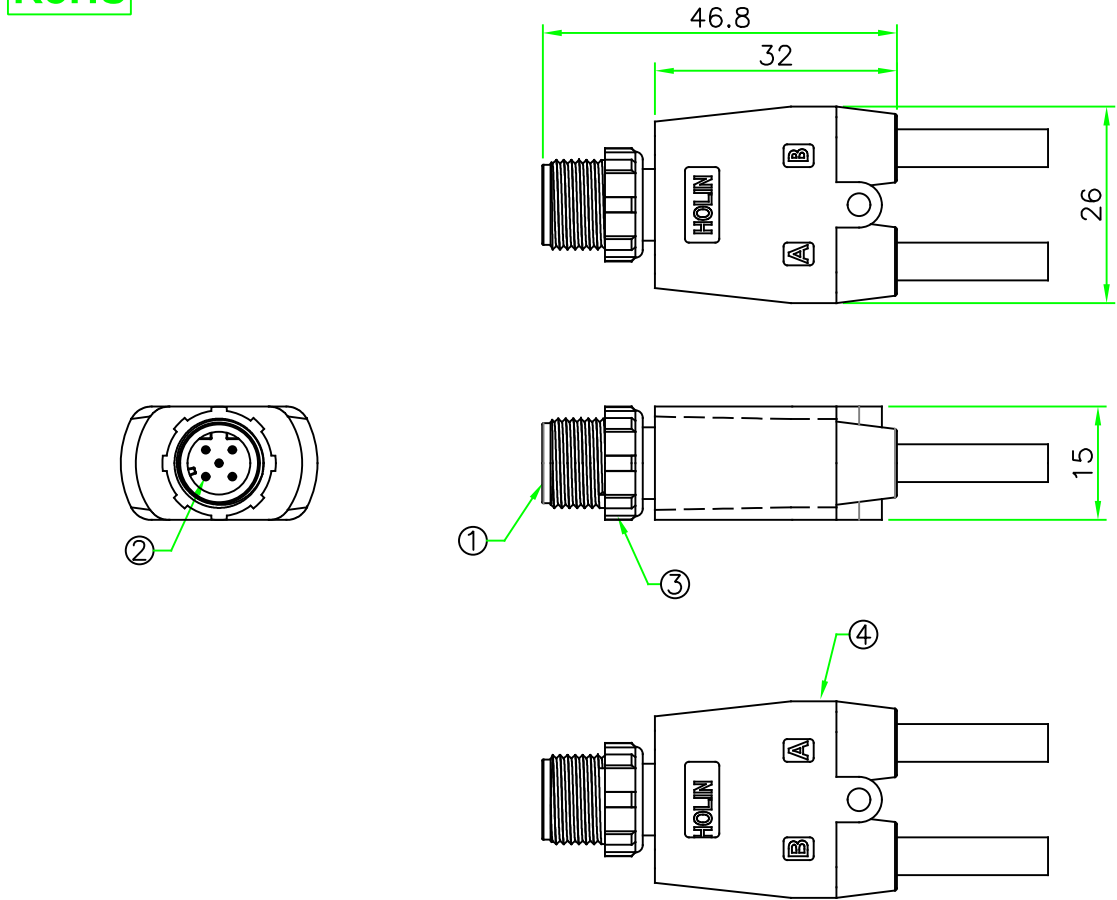


REV.	DESCRIPTION	DATE
A	ISSUE	May/18/2026

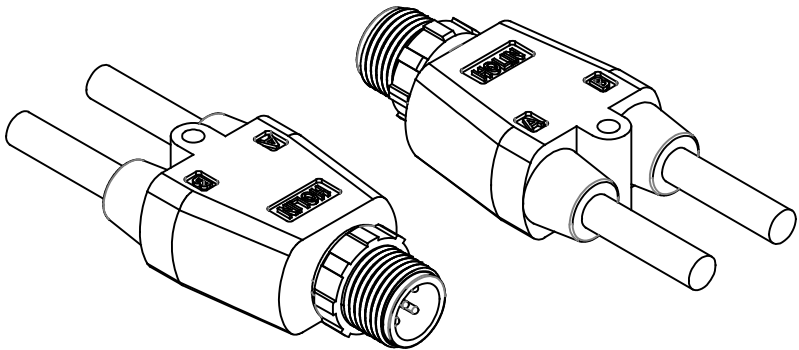

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: D12Y-PMCCxx00
- 02 - 2 PINS
03 - 3 PINS
04 - 4 PINS
05 - 5 PINS

※Cable specification and length can be customized.

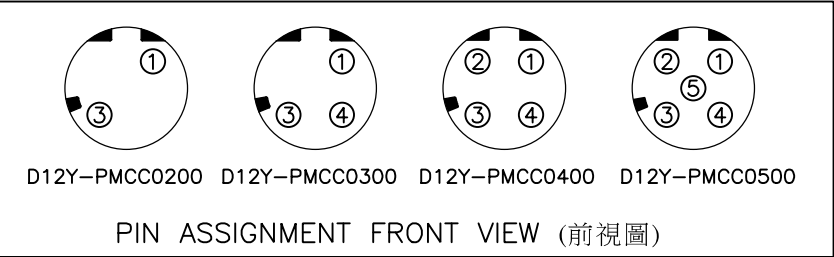

4	OVERMOLD	PU or PVC.	BLACK	1	29-135-N3
3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass , 6u" Gold Plated. Male Pin.		N	
1	CONNECTOR	M12 D-Coding Male Connector Insert, Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE: M12 D-Coding Male All Plastic Y-Split Molded Cable Ass'y			
SCALE: 1:1		P/N: D12Y-PMCCxx00		DR. SIBYL	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		DWG.NO: D12Y-PMCCxx00		CH. JAMES	
REV. A		SHEET 1/1		AP.	