
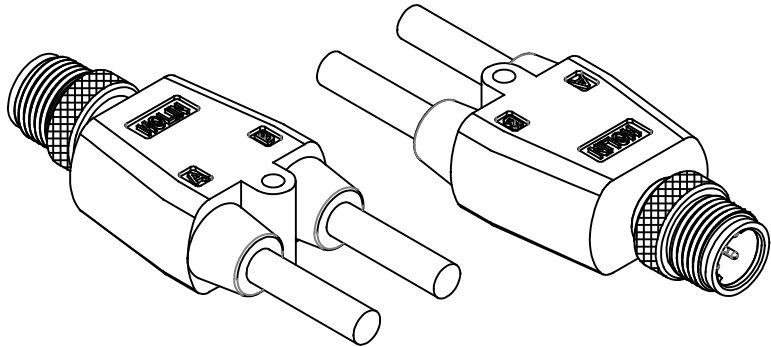


RoHS

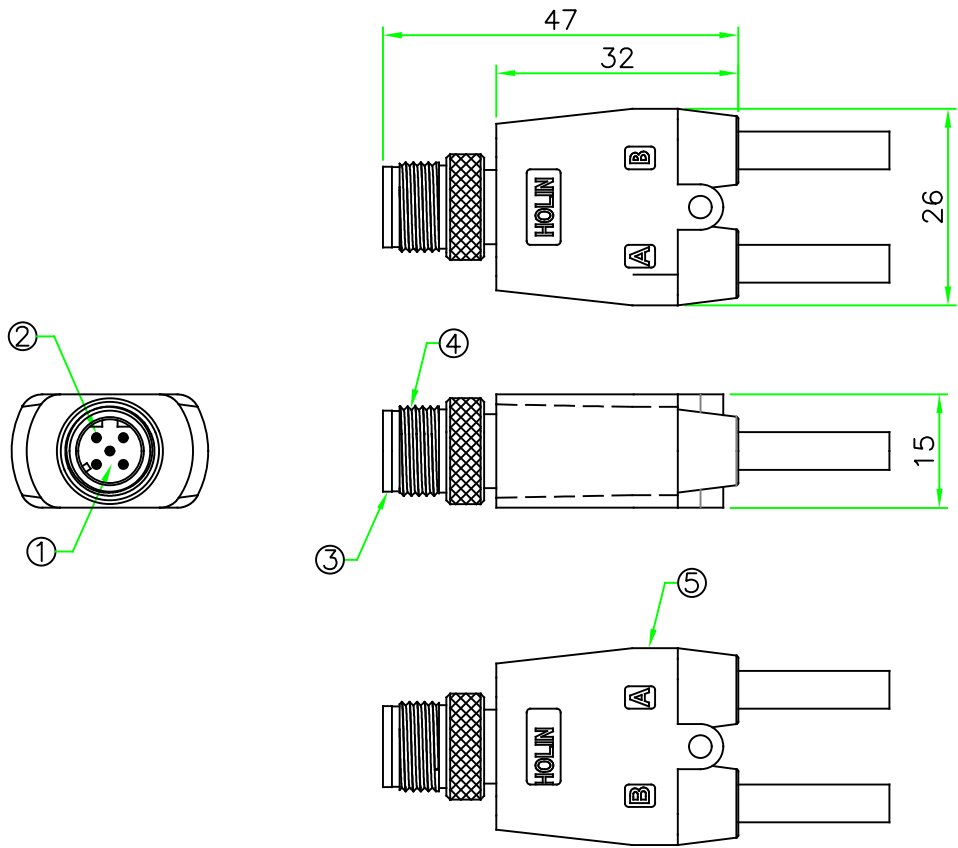

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 4A

TEMPERATURE RANGE: -25°C TO +85°C


DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: D12Y-SMCCxx00

- 02 - 2 PINS
03 - 3 PINS
04 - 4 PINS
05 - 5 PINS

※Cable specification and length can be customized.

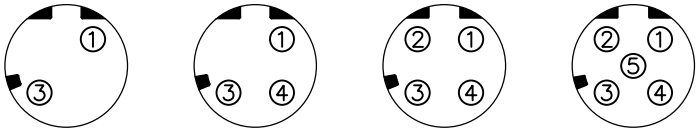

D12Y-SMCC0200 D12Y-SMCC0300 D12Y-SMCC0400 D12Y-SMCC0500

PIN ASSIGNMENT FRONT VIEW (前視圖)

5	OVERMOLD	PU or PVC.	BLACK	1	29-135-N3
4	RING NUT	Brass, Nickel Plated.		1	
3	METAL SHELLE	Brass, Nickel Plated.		1	
2	CONTACT	Brass , 6u" Gold Plated. Male Pin.		N	
1	CONNECTOR	M12 D-Coding Male Connector Insert, Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE : M12 D-Coding Male Shielded Y-Split Molded Cable Ass'y
SCALE 1:1	
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°	P/N: D12Y-SMCCxx00
REV. A	DR. SIBYL
SHEET 1/1	CH. JAMES
	AP.
	DWG.NO: D12Y-SMCCxx00