

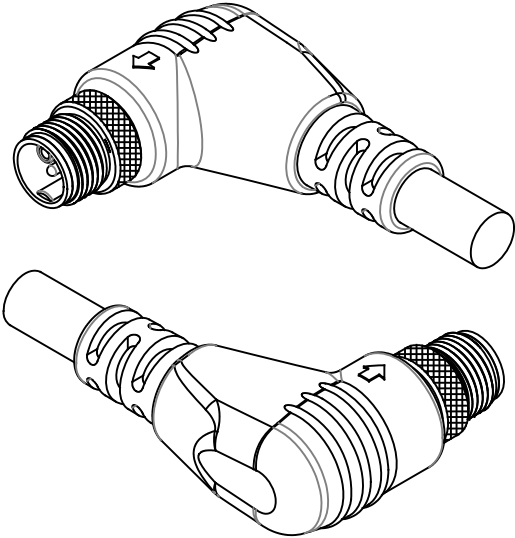


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/02/2024

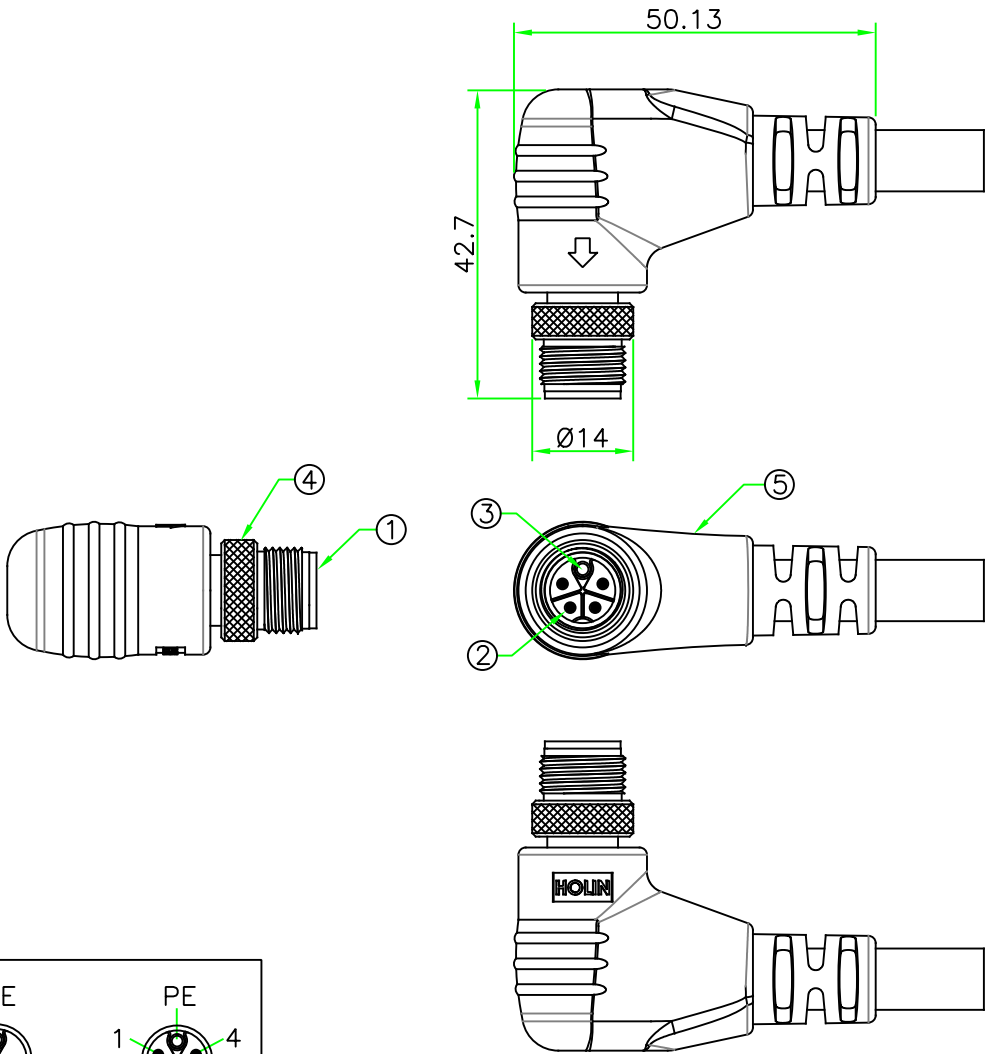

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 12A
VOLTAGE RATING : 630V
TEMPERATURERANGE : -25°C TO +85°C.
DIELECTRIC WITHSTANDING VOLTAGE :
500V AV FOR ONE MINUTE.
 - HOW TO ORDER: K12P-M5xxRM
03 - 3 PINS (2+PE)
04 - 4 PINS (3+PE)
05 - 5 PINS (4+PE)

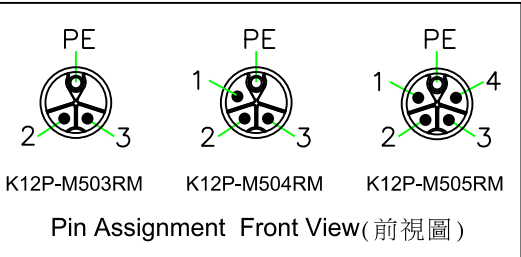

※Cable specification and length can be customized.

5	OVERMOLD	PU or PVC.	BLACK	1	309-135
4	RING NUT	BRASS, Nickel Plated.		1	
3	CONTACT	BRASS, 6u" Gold Plated. Female Contact.		1	
2	CONTACT	BRASS, 6u" Gold Plated. Male Contact.		N	
1	CONNECTOR	M12 K-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE M12 K-Coding Male Connector Right Angle With S/R Molded Cable Ass'y			
SCALE 1:1		P/N: K12P-M5xxRM		DR. JAMES	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		DWG.NO: K12P-M5xxRM		CH. ERIC	
REV. A		SHEET 1/1		AP.	