
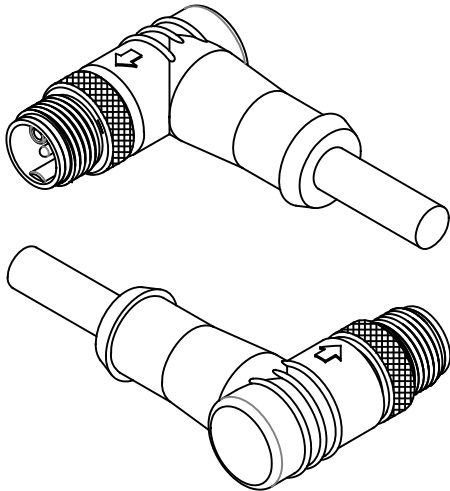


RoHS

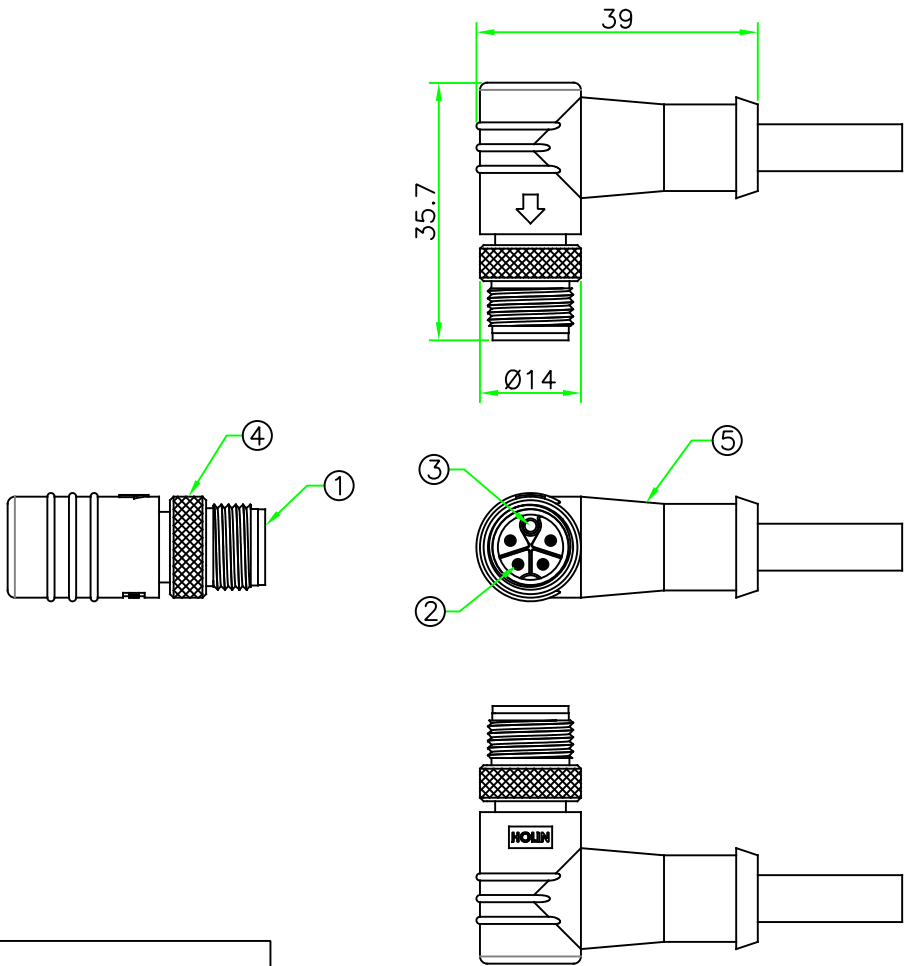

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 12A

VOLTAGE RATING : 630V

TEMPERATURERANGE : -25°C TO +85°C.


DIELECTRIC WITHSTANDING VOLTAGE :
500V AV FOR ONE MINUTE.

2. HOW TO ORDER: K12P-M5xxRN

03 - 3 PINS (2+PE)

04 - 4 PINS (3+PE)

05 - 5 PINS (4+PE)

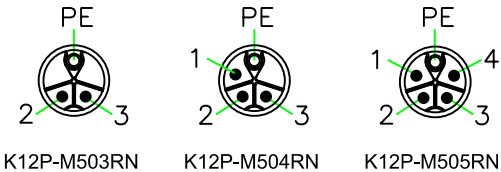

Pin Assignment Front View(前視圖)

※Cable specification and length can be customized.

5	OVERMOLD	PU or PVC.	BLACK	1	202-135
4	RING NUT	BRASS, Nickel Plated.		1	
3	CONTACT	BRASS, 6u" Gold Plated. Female Contact.		1	
2	CONTACT	BRASS, 6u" Gold Plated. Male Contact.		N	
1	CONNECTOR	M12 K-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE			
SCALE		M12 K-Coding Male Connector Right Angle Molded Cable Ass'y			
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:		DR. JAMES	
XX. ± 1.0		K12P-M5xxRN		CH. ERIC	
.X ± 1.0 .XX ± 0.5					
.XXX ± 0.25 ANGLE ± 1°					
REV. A		SHEET 1/1		DWG.NO: K12P-M5xxRN	
				AP.	