



RoHS

IP66-68

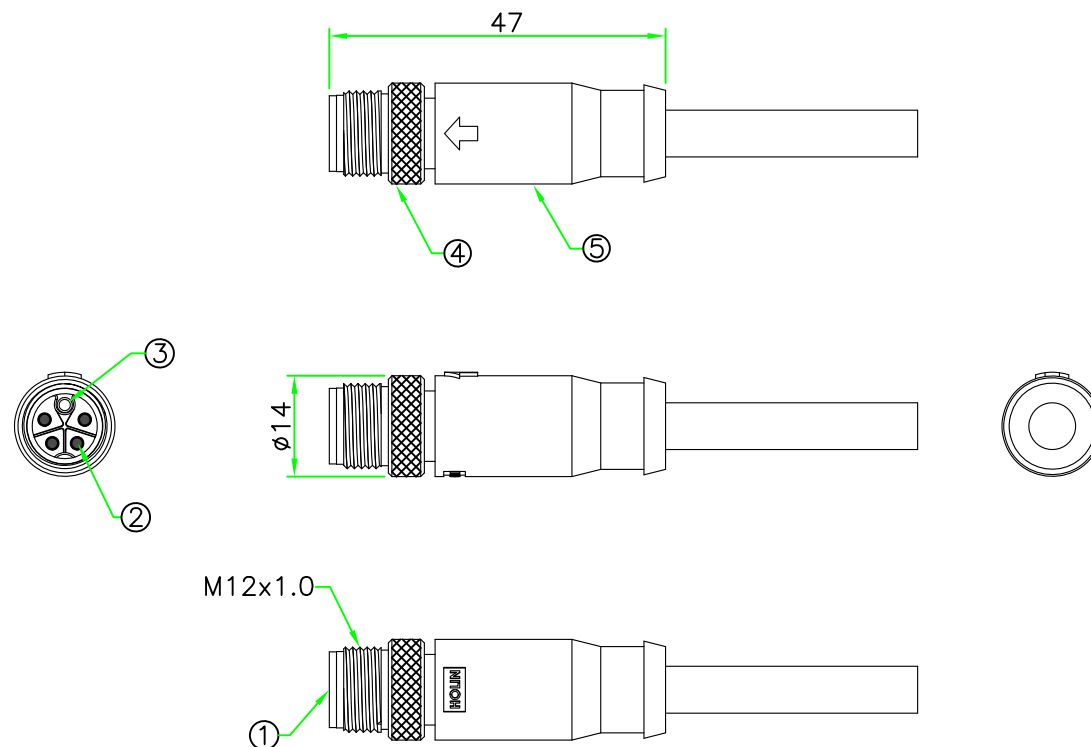

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/15/2018

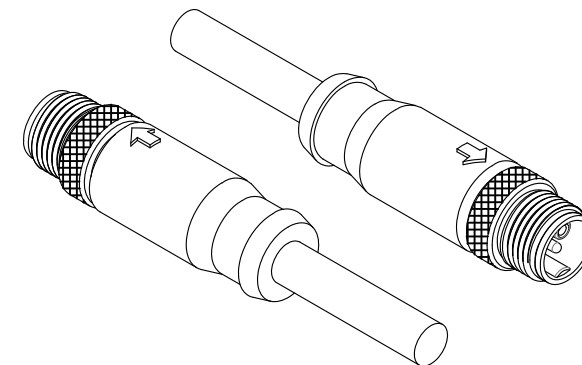

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 12A


2. HOW TO ORDER: K12P-M5xxSN

03 - 3 PIN

04 - 4 PIN

05 - 5 PIN

*Cable specification and length can be customized.

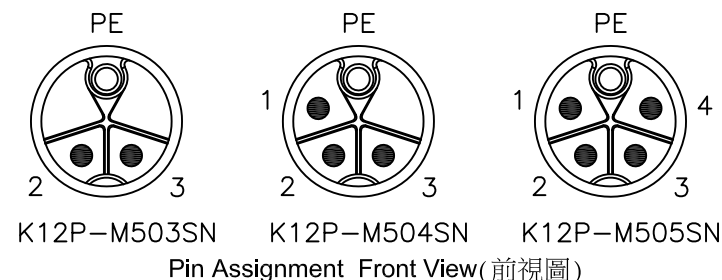

5	OVERMOLD	PU or PVC.	BLACK	1	
4	RING NUT	Brass, Nickel Plated.		1	M12D-MC-SN(A3)
3	CONTACT	Brass , 6 u" Gold Plated .Female Contact.		1	PF1.5SL18.6-01(A)
2	CONTACT	Brass , 6 u" Gold Plated .Male Contact.		N	PM1.5SL18.45-01(A)
1	CONNECTOR	M12 K-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : M12 K-Coding Male Connector Molded Cable Ass'y			
	SCALE 1:1	P/N: K12P-M5xxSN			
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ± 0.5 XX ± 0.25 XXX ± 0.1 ANGLE ± 1°		DR. SIBYL		CH. ERIC	
REV. A	SHEET 1/1	DWG.NO: K12P-M5xxSN		AP.	