
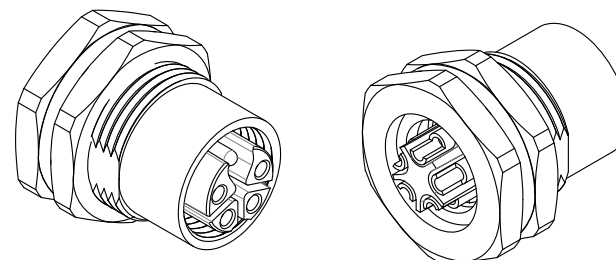

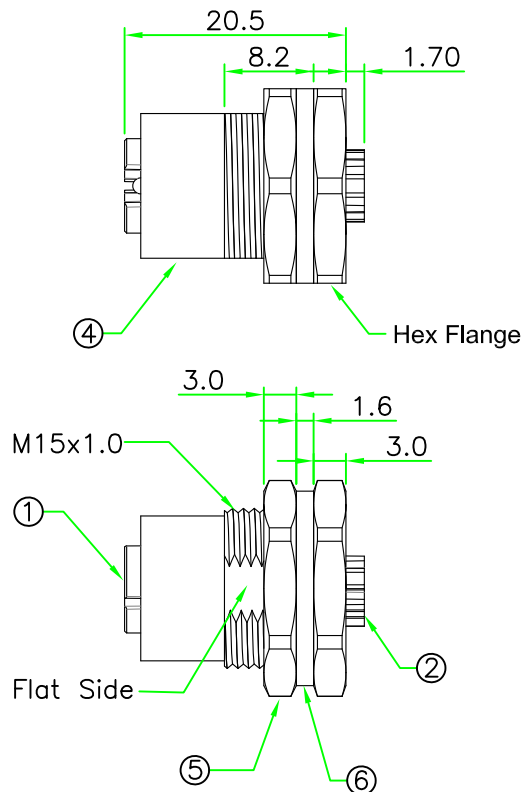


RoHS
IP66~68

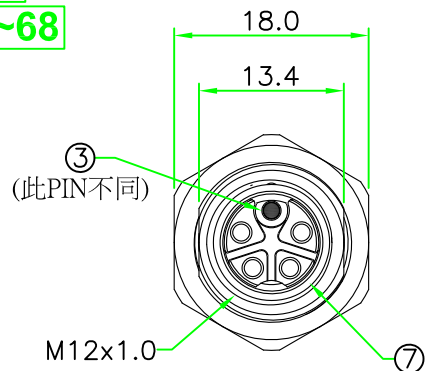


NOTES:

1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 12A
2. PANEL THICKNESS MAX. 3.0mm.
3. HOW TO ORDER: K12P-M6xxHSR


03 - 3 PIN
04 - 4 PIN
05 - 5 PIN



K12P-M603HSR



K12P-M604HSR



K12P-M605HSR

Pin Assignment Front View(前視圖)

8	GLUE	Epoxy	BLACK		
7	O-RING	Viton.	BLACK	1	
6	GASKET	EPDM.	BLACK	1	
5	HEX NUT	Brass, Nickel Plated.		1	
4	HOUSING	Brass, Nickel Plated.		1	
3	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 K-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : M12 K-Coding Female Panel Connector Rear Mount Hex Flange With Solder Bucket Pin
SCALE	1.5:1	
UNLESS OTHERWISE SPECIFIED TOLERANCES: x ±0.5 xx ±0.25 xxx ±0.1 ANGLE ±1°		P/N: K12P-M6xxHSR
REV. A	SHEET 1/1	DWG.NO: K12P-M6xxHSR

DR. SIBYL
CH. ERIC
AP.