

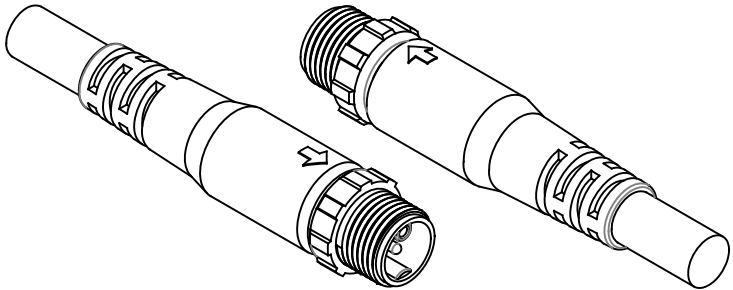


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/03/2024

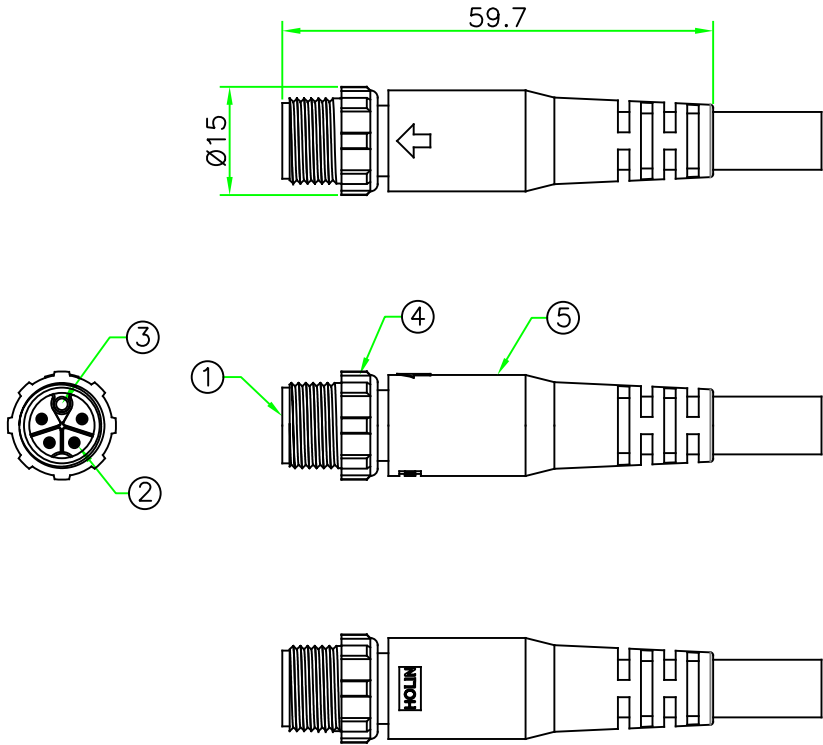

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 12A
VOLTAGE RATING : 630V
TEMPERATURERANGE : -25°C TO +85°C.
DIELECTRIC WITHSTANDING VOLTAGE :
500V AV FOR ONE MINUTE.
2. HOW TO ORDER: K12P-P5xxSM
- 03 - 3 PINS (2+PE)
 - 04 - 4 PINS (3+PE)
 - 05 - 5 PINS (4+PE)

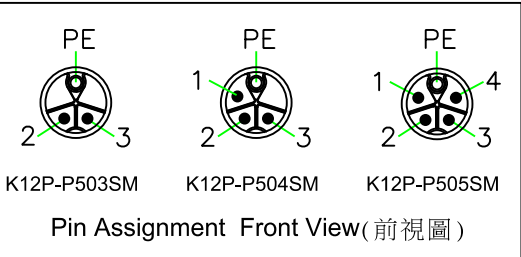

※Cable specification and length can be customized.

5	OVERMOLD	PU or PVC.	BLACK	1	98-135-N7
4	RING NUT	Nylon+GF.	BLACK	1	
3	CONTACT	BRASS, 6u" Gold Plated. Female Contact.		1	
2	CONTACT	BRASS, 6u" Gold Plated. Male Contact.		N	
1	CONNECTOR	M12 K-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE M12 K-Coding Male Connector All Plastic With S/R Molded Cable Ass'y		
SCALE	1:1	UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N: K12P-P5xxSM	DR. JAMES CH. ERIC
REV. A	SHEET 1/1	DWG.NO: K12P-P5xxSM	AP.		