
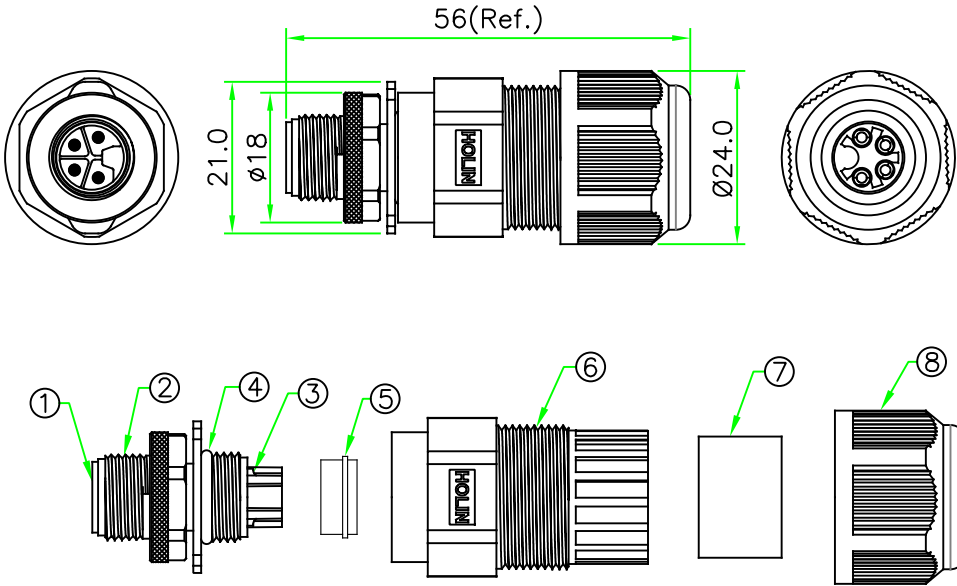


RoHS


REV.	DESCRIPTION	DATE
A	ISSUE	Aug/05/2024

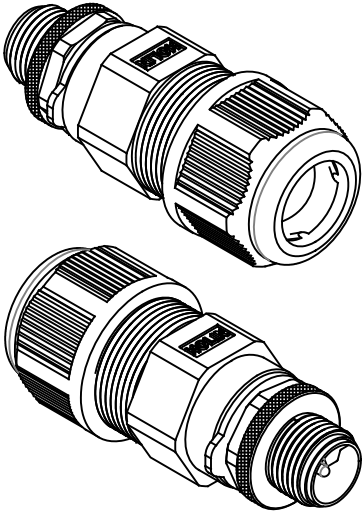

NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 16A.
VOLTAGE RATING : 63V .
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: L12P-M1xxSA-x

- 1 - Tube 01 7mm
- 2 - Tube 02 9mm
- 3 - Tube 03 10mm
- 4 - Tube 04 11mm
- 5 - Tube 05 12mm
- 6 - Tube 06 14mm
- 02 - 2 PINS
- 03 - 3 PINS
- 04 - 4 PINS

#2 Zipper PE Bag.

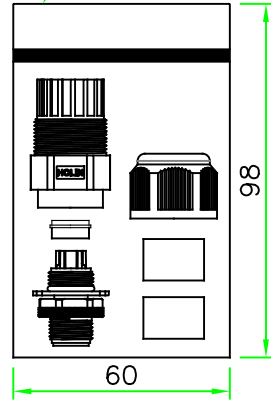

L12P-M102SA-x L12P-M103SA-x L12P-M104SA-x
Pin Assignment Front View (前視圖)

8	CLAMP NUT	NYLON+GF.	BLACK	1		HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
7	TUBE	RUBBER.	BLACK	1					
6	HOOD	NYLON.	BLACK	1			UNIT: mm	TITLE : M12 L-Coding Male Connector Male Pin With Solder Bucket Field Installable Plug	
5	GASKET	SILICON.	BLACK	1			SCALE 1:1		
4	O-RING	SILICON.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		P/N: L12P-M1xxSA-x	DR. JAMES
3	CONTACT	BRASS, Male Pin. 6u" Gold Plated.		N					CH. ERIC
2	RING NUT	BRASS, Nickel Plated.		1					
1	CONNECTOR	M12 L-Coding Male Connector Insert. Nylon+GF.	BLACK	1		REV. A	SHEET 1/1	DWG.NO: L12P-M1xxSA-x	AP.
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS				