

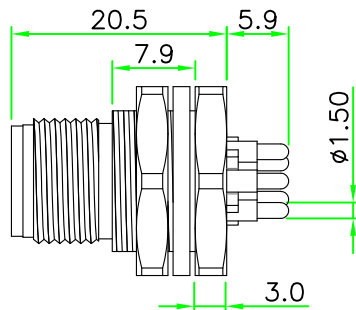


RoHS
IP67

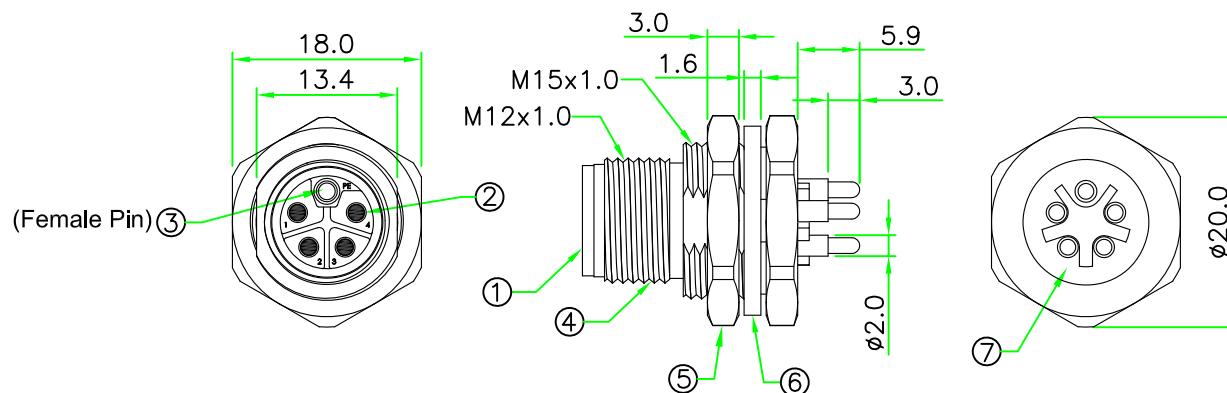


REV.	DESCRIPTION	DATE
A	ISSUE	Sep/15/2022

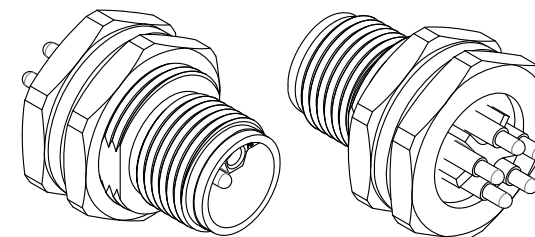

NOTES:

- ELECTRICAL CHARACTERISTICS:
VOLTAGE RATING : 63V
CURRENT RATING: 16A
- PANEL THICKNESS MAX. 3.0mm.
- HOW TO ORDER: L12P-M5xxHPR

503 - 2 PIN+PE
504 - 3 PIN+PE
505 - 4 PIN+PE

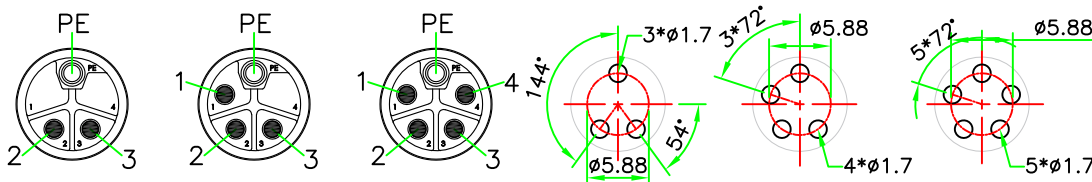

L12P-M503HPR L12P-M504HPR L12P-M505HPR L12P-M503HPR L12P-M504HPR L12P-M505HPR
Pin Assignment Front View(前视图) PCB LAYOUT

7	GLUE	Epoxy.	BLACK		
6	GASKET	EPDM.	BLACK	1	
5	HEX NUT	BRASS, Nickel Plated.		1	
4	HOUSING	BRASS, Nickel Plated.		1	
3	CONTACT	BRASS, 6 u" Gold Plated. Female Contact.		1	
2	CONTACT	BRASS, 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	M12 L-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD 禾凌科技股份有限公司							
		UNIT: mm	TITLE M12 L-Coding Male Panel Connector Rear Mount Hex Flange With PCB Pin				
		1.5:1	P/N: L12P-M5xxHPR				
UNLESS OTHERWISE SPECIFIED TOLERANCES: xx. ± 0.5 .x ± 0.5 .xx ± 0.25 .xxx ± 0.1 ANGLE ± 1°							
REV.		SHEET				DWG.NO:	
A		1/1				L12P-M5xxHPR	
					DR. JAMES		
					CH. ERIC		
					AP.		