
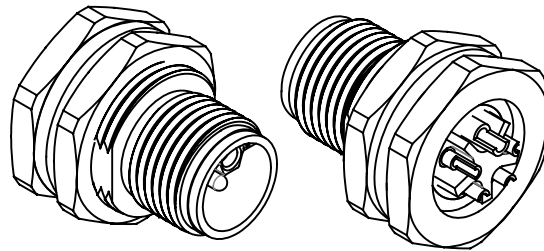

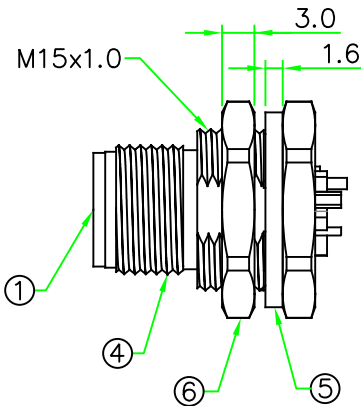
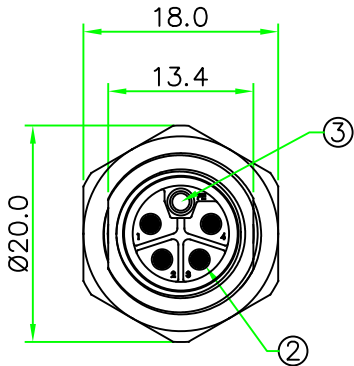


Recommended
Panel Cut-Out


RoHS

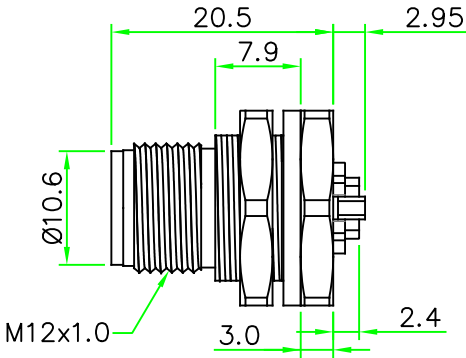

NOTES:

1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 16 A
RATED VOLTAGE : 63 V
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. PANEL THICKNESS MAX. 3.0mm
3. HOW TO ORDER: L12P-M5xxHSR

03 - 3 PINS
04 - 4 PINS
05 - 5 PINS

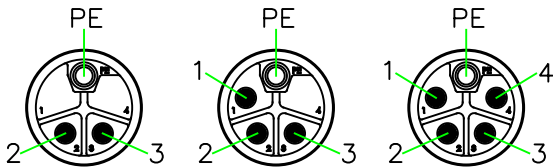

L12P-M503HSR L12P-M504HSR L12P-M505HSR

PIN ASSIGNMENT FRONT VIEW (前視圖)

7	GLUE	EPOXY.	BLACK	1	
6	HEX NUT	BRASS, Nickel Plated.		1	
5	GASKET	EPDM.	BLACK	1	
4	HOUSING	BRASS, Nickel Plated.		1	
3	CONTACT	BRASS, 6u" Gold Plated. Female Contact.		1	
2	CONTACT	BRASS, 6u" Gold Plated . Male Contact.		N	
1	CONNECTOR	M12 L-Coding Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司				
	UNIT: mm	TITLE M12 L-Coding Male Panel Connector Rear mount Hex Flange With Solder Bucket Pin		
	SCALE 1.5:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		P/N: L12P-M5xxHSR		DR. JAMES
REV. A		SHEET 1/1		CH. ERIC
		DWG.NO: L12P-M5xxHSR		AP.