

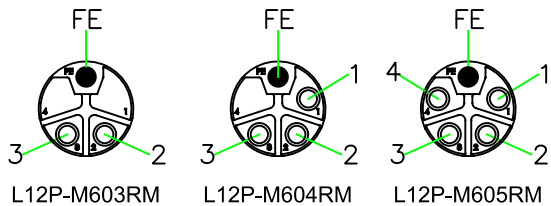


RoHS

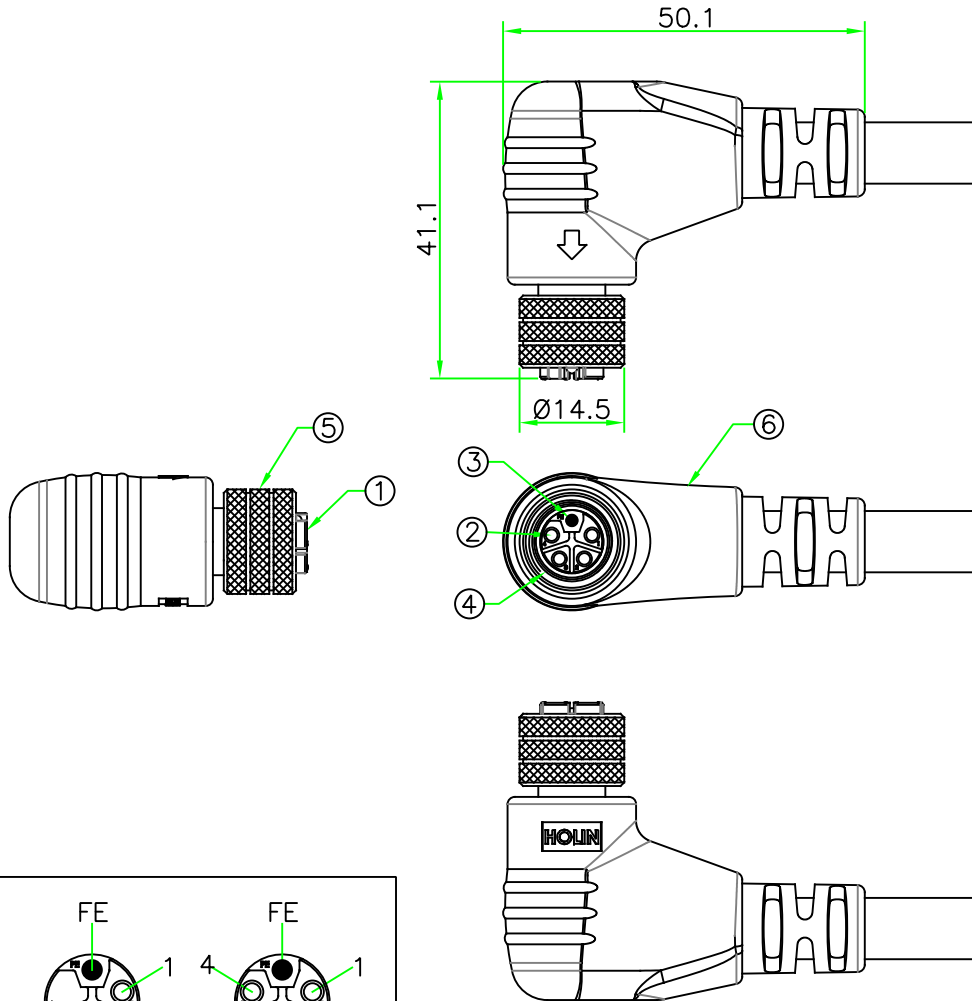

PIN ASSIGNMENT FRONT VIEW (前視圖)

※Cable specification and length can be customized.

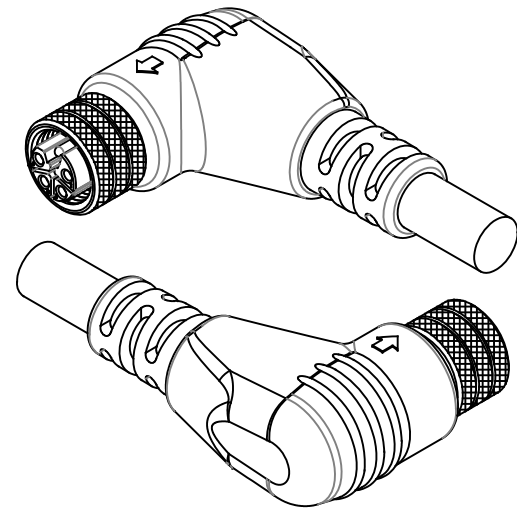

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 16 A
RATED VOLTAGE : 63 V
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: L12P-M6xxRM
03 - 3 PINS (2+FE)
04 - 4 PINS (3+FE)
05 - 5 PINS (4+FE)

6	OVERMOLD	PU or PVC.	BLACK	1	309-135
5	RING NUT	BRASS, Nickel Plated.		1	
4	O-RING	Viton.	BLACK	1	
3	CONTACT	BRASS, 6u" Gold Plated. Male Contact.		1	
2	CONTACT	BRASS, 6u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 L-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.		禾凌科技股份有限公司	
UNIT: mm	SCALE 1:1	TITLE : M12 L-Coding Female Connector Right Angle With S/R Molded Cable Ass'y	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N: L12P-M6xxRM	DR. JAMES
REV. A	SHEET 1/1	DWG.NO: L12P-M6xxRM	CH. ERIC
			AP.