
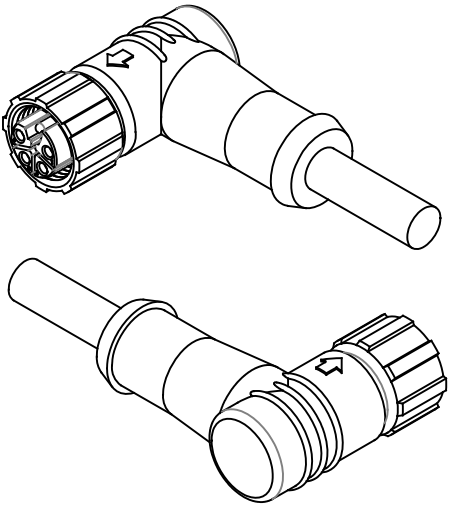


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/05/2024

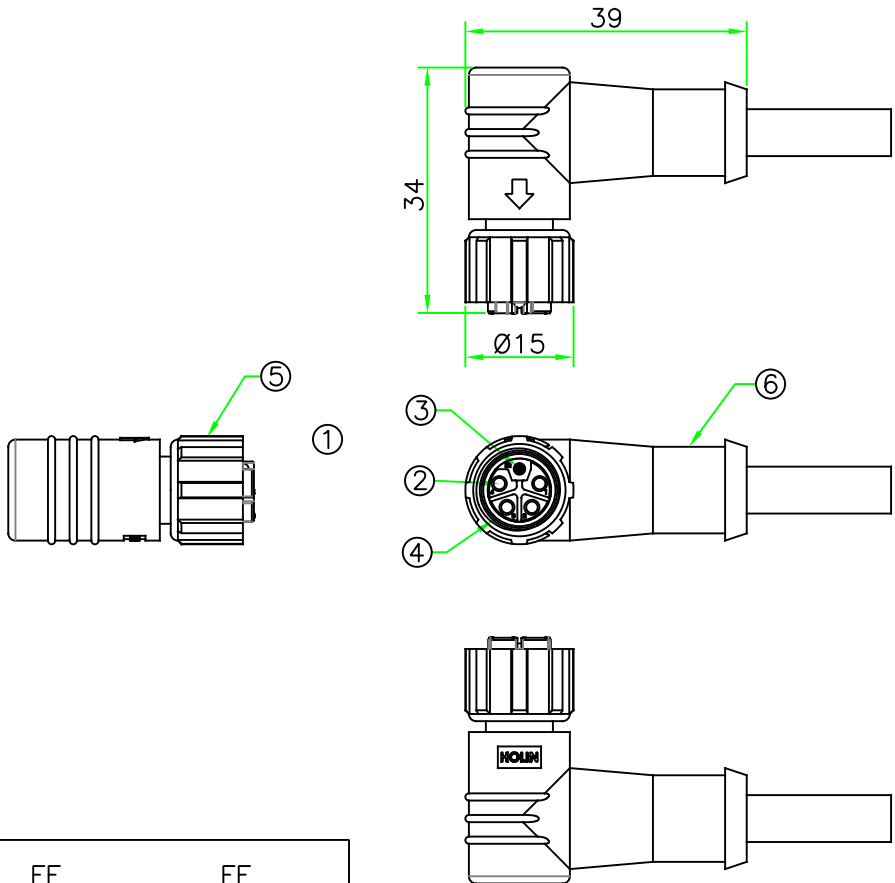

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 16 A

RATED VOLTAGE : 63 V

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:


500V AC FOR ONE MINUTE

2. HOW TO ORDER: L12P-P6xxRN

03 - 3 PINS (2+FE)

04 - 4 PINS (3+FE)

05 - 5 PINS (4+FE)

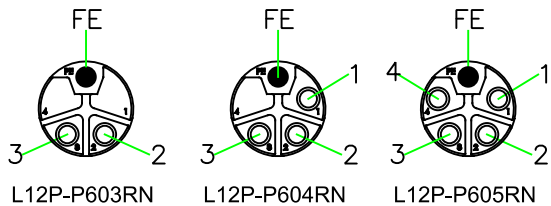

L12P-P603RN L12P-P604RN L12P-P605RN

PIN ASSIGNMENT FRONT VIEW (前視圖)

※Cable specification and length can be customized.

6	OVERMOLD	PU or PVC.	BLACK	1	202-135		UNIT: mm	TITLE : M12 L-Coding Female Connector All Plastic Right Angle Molde Cable Ass'y	
5	RING NUT	Nylon+GF.	BLACK	1		SCALE 1:1			
4	O-RING	Viton.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N: L12P-P6xxRN	DR. JAMES
3	CONTACT	BRASS, 6u" Gold Plated. Male Contact.		1					CH. ERIC
2	CONTACT	BRASS, 6u" Gold Plated. Female Contact.		N		REV. A	SHEET 1/1	DWG.NO: L12P-P6xxRN	AP.
1	CONNECTOR	M12 L-Coding Female Connector Insert. Nylon+GF.	BLACK	1					
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS				