
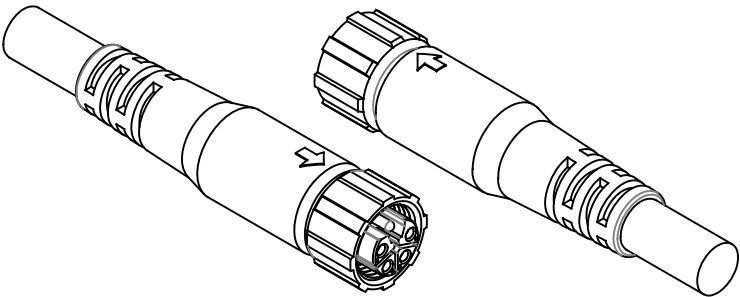



RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/05/2024

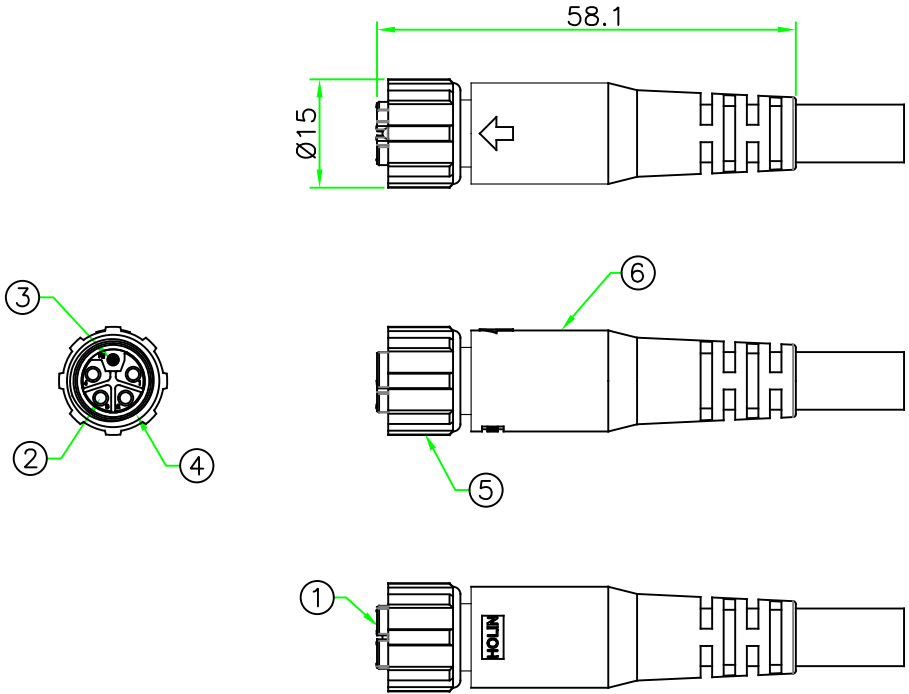

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 16 A
RATED VOLTAGE : 63 V
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: L12P-P6xxSM

03 - 3 PINS (2+FE)
04 - 4 PINS (3+FE)
05 - 5 PINS (4+FE)

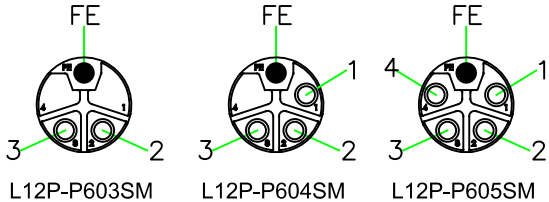

PIN ASSIGNMENT FRONT VIEW (前視圖)

※Cable specification and length can be customized.

6	OVERMOLD	PU or PVC.	BLACK	1	98-135-N7		UNIT: mm	TITLE : M12 L-Coding Female Connector All Plastic Molded Cable Ass'y		
5	RING NUT	Nylon+GF.	BLACK	1		SCALE	1:1			
4	O-RING	Viton.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N: L12P-P6xxSM		DR. JAMES
3	CONTACT	BRASS, 6u" Gold Plated. Male Contact.		1						CH. ERIC
2	CONTACT	BRASS, 6u" Gold Plated. Female Contact.		N						
1	CONNECTOR	M12 L-Coding Female Connector Insert. Nylon+GF.	BLACK	1		REV.	SHEET	DWG.NO: L12P-P6xxSM		AP.
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	1/1			