

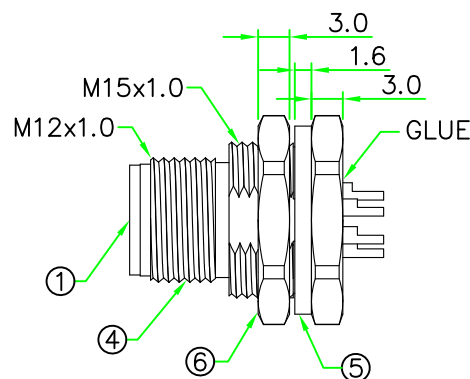
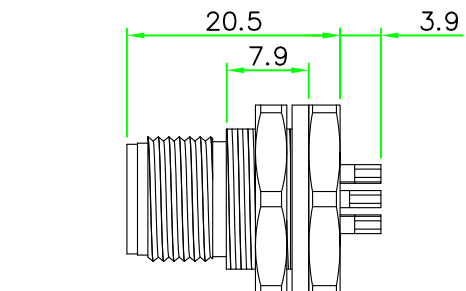


Recommended
Panel Cut-Out

RoHS

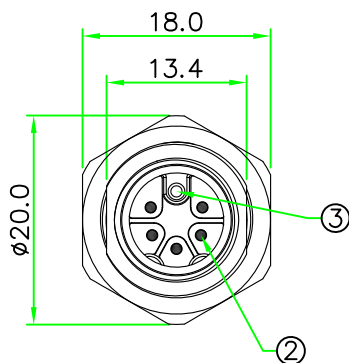

REV.	DESCRIPTION	DATE
A	ISSUE	May/03/2022

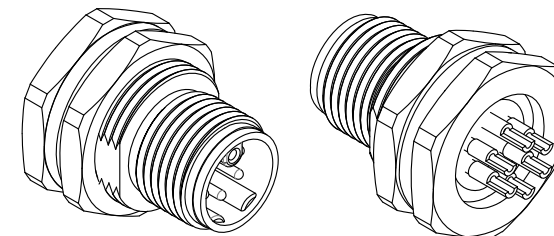

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 8A

VOLTAGE RATING : 630V

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

2. PANEL THICKNESS MAX. 3.0mm


2. HOW TO ORDER: M12P-M5xxHSR

03 - 3 PIN (2+PE)

04 - 4 PIN (3+PE)

05 - 5 PIN (4+PE)

06 - 6 PIN (5+PE)

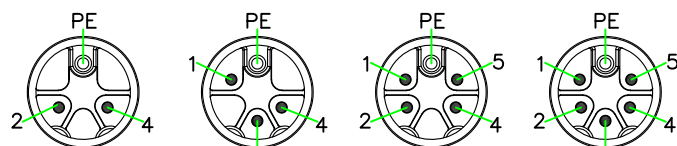

M12P-M503HSR M12P-M504HSR M12P-M505HSR M12P-M506HSR
PIN ASSIGNMENT FRONT VIEW (前視圖)

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

6	HEX NUT	BRASS, Nickel Plated.		1			UNIT: mm	TITLE	M12 M-Coding Male Panel Connector	DR.	JAMES
5	GASKET	EPDM.	BLACK	1			SCALE	1.5:1	Rear mount Hex Flange	CH.	ERIC
4	HOUSING	BRASS, Nickel Plated.		1			UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N:	M12P-M5xxHSR	DWG.NO:	M12P-M5xxHSR
3	CONTACT	BRASS , 6 u" Gold Plated . Female Contact.		1			xx, ± 0.5				
2	CONTACT	BRASS , 6 u" Gold Plated . Male Contact.		N			.x ± 0.5 .xx ± 0.25				
1	CONNECTOR	M12 M-Coding Male Connector Insert.NYLON+GF.	BLACK	1			.xxx± 0.1 ANGLE ± 1°				
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV.	SHEET				
						A	1/1				