




RoHS

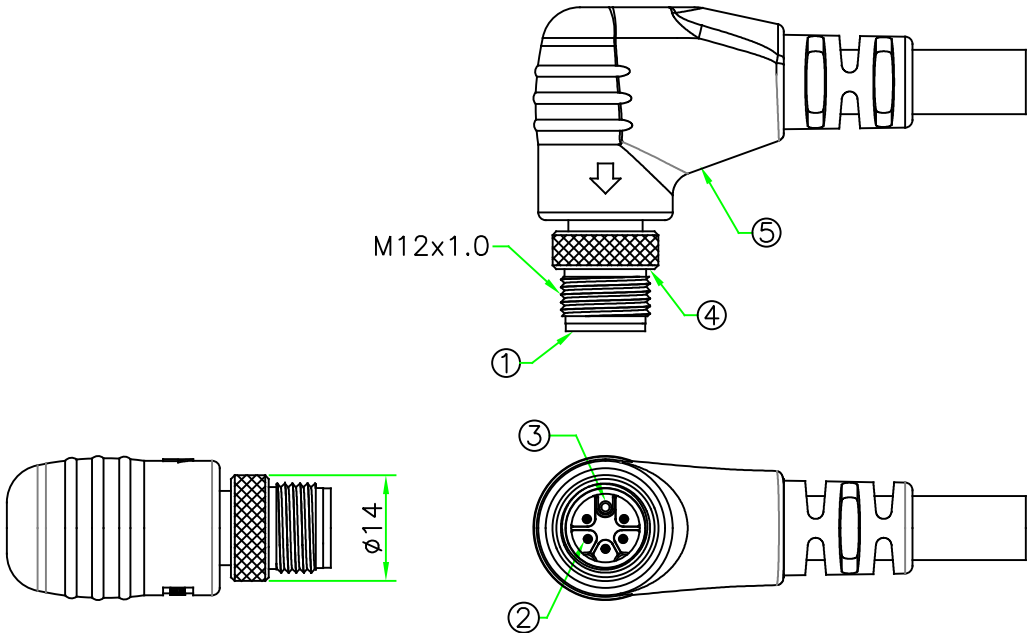

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/04/2024

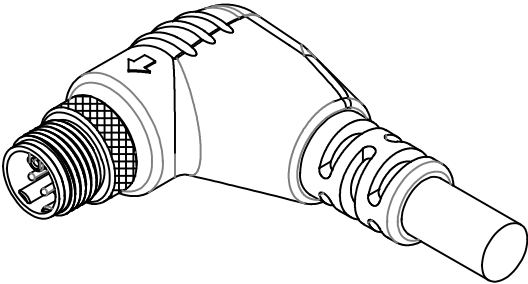

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 8A
VOLTAGE RATING : 630V
TEMPERTAURE RANGE : -25°c TO +85°C
DIELECTRIC WITHSTANDING VOLATGE: 500V AC FOR ONE MINUTE
2. HOW TO ORDER: M12P-M5xxRM
- 03 - 3 PINS (2+PE)
 - 04 - 4 PINS (3+PE)
 - 05 - 5 PINS (4+PE)
 - 06 - 6 PINS (5+PE)

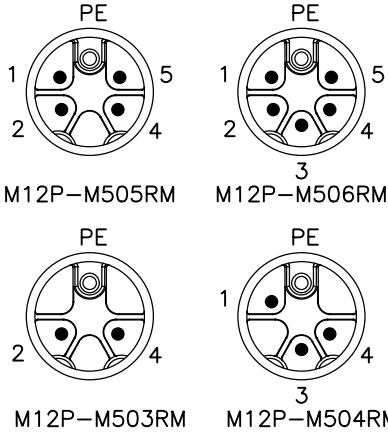

Pin Assignment Front View(前視圖)

*Cable specification and length can be customized.

5	OVERMOLD	PU or PVC.	BLACK	1	309-135
4	RING NUT	Brass, Nickel Plated.		1	M12D-MC-SN
3	CONTACT	Brass , 6 u" Gold Plated. Female Contact.		1	M12F-1.0SPL20.5
2	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		N	PM1.0SL22.3-01
1	CONNECTOR	M12 M-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : M12 M-Coding Male Connector R/A Molded Cable Ass'y		
SCALE		1:1			
UNLESS OTHERWISE SPECIED TOLERANCES:		P/N:		DR. SIBYL	
XX. ± 1.0		M12P-M5xxRM		CH. JAMES	
.X ± 1.0 .XX ± 0.5					
.XXX ± 0.25					
ANGLE ± 1°					
REV.		SHEET		DWG.NO:	
A		1/1		M12P-M5xxRM	
				AP.	