
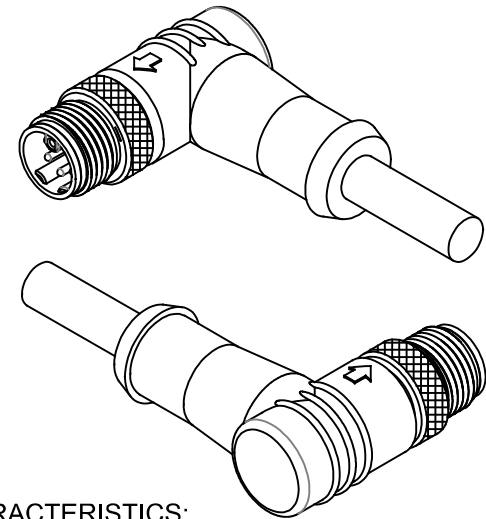
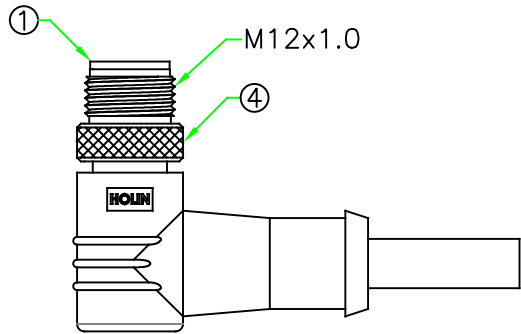
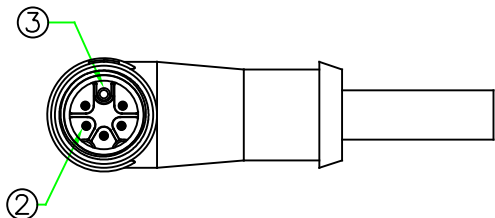



RoHS

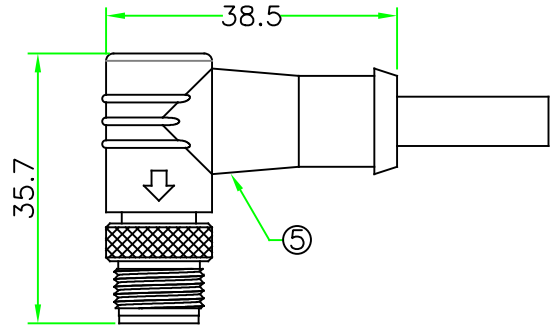

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 8A

VOLTAGE RATING : 630V


TEMPERTAURE RANGE : -25°c TO +85°C

DIELECTRIC WITHSTANDING VOLATGE:


500V AC FOR ONE MINUTE

2. HOW TO ORDER: M12P-M5xxRN


- 03 - 3 PIN (2+PE)
04 - 4 PIN (3+PE)
05 - 5 PIN (4+PE)
06 - 6 PIN (5+PE)




M12P-M505RN



M12P-M506RN



M12P-M503RN



M12P-M504RN

Pin Assignment Front View(前視圖)

※Cable specification and length can be customized.

5	OVERMOLD	PU or PVC.	BLACK	1	
4	RING NUT	Brass, Nickel Plated.		1	M12D-MC-SN(A3)
3	CONTACT	Brass , 6 u" Gold Plated. Female Contact.		1	M12F-1.0SPL20.5(A1)
2	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		N	M12M-1.0SPL22(B)
1	CONNECTOR	M12 M-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE : M12 M-Coding Male Connector R/A Molded Cable Ass'y			
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:		DR. SIBYL	
XX ± 1.0		M12P-M5xxRN		CH. JAMES	
.X ± 1.0 .XX ± 0.5		DWG.NO:		AP.	
.XXX ± 0.25 ANGLE ± 1°		M12P-M5xxRN			
REV.		SHEET			
A		1/1			