

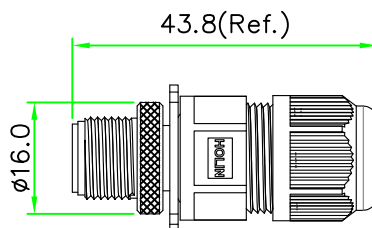


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	May/12/2022

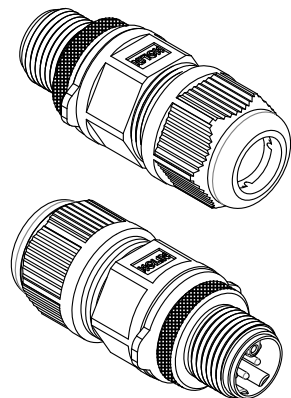

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 8A

VOLTAGE RATING : 630V

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. HOW TO ORDER: M12P-M5xxSA

03 - 3 PIN (2+PE)



04 - 4 PIN (3+PE)

05 - 5 PIN (4+PE)

06 - 6 PIN (5+PE)

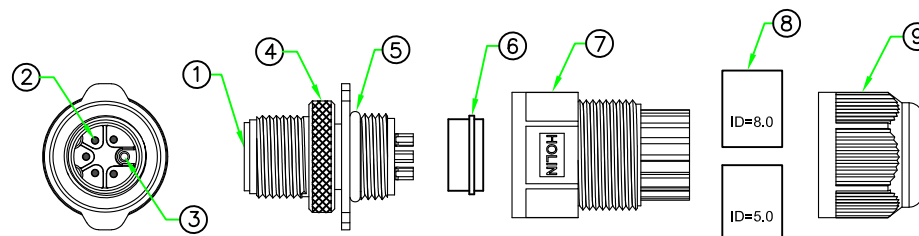

#2 Zipper PE Bag.

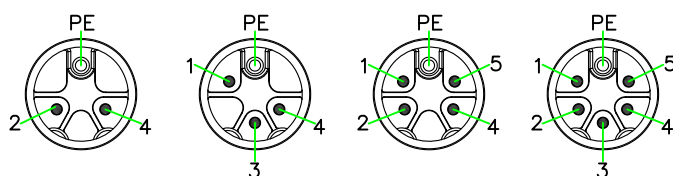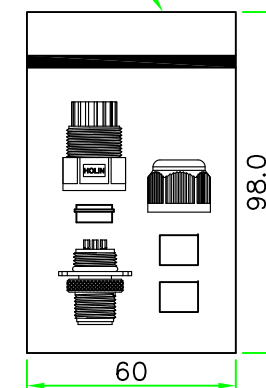

M12P-M503SA M12P-M504SA M12P-M505SA M12P-M506SA

PIN ASSIGNMENT FRONT VIEW (前視圖)

9	CLAMP NUT	NYLON+GF.	BLACK	1	
8	TUBE	EPDM (ID=5.0 & 8.0mm)	BLACK	2	
7	HOOD	NYLON.	BLACK	1	
6	GASKET	Silicon.	BLACK	1	
5	O-RING	Silicon.	BLACK	1	
4	SCREW NUT	BRASS , Nickel Plated.		1	
3	CONTACT	BRASS , Female Pin. 6u" Gold Plated.		1	
2	CONTACT	BRASS , Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	M12 M-Coding Male Connector Insert. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE	M12 M-Coding Male Connector Male/Female Pin Field Installable Plug
SCALE	1:1	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°	P/N:	M12P-M5xxSA
REV.	SHEET	DWG.NO:
A	1/1	M12P-M5xxSA
		DR. JAMES CH. ERIC AP.