



RoHS

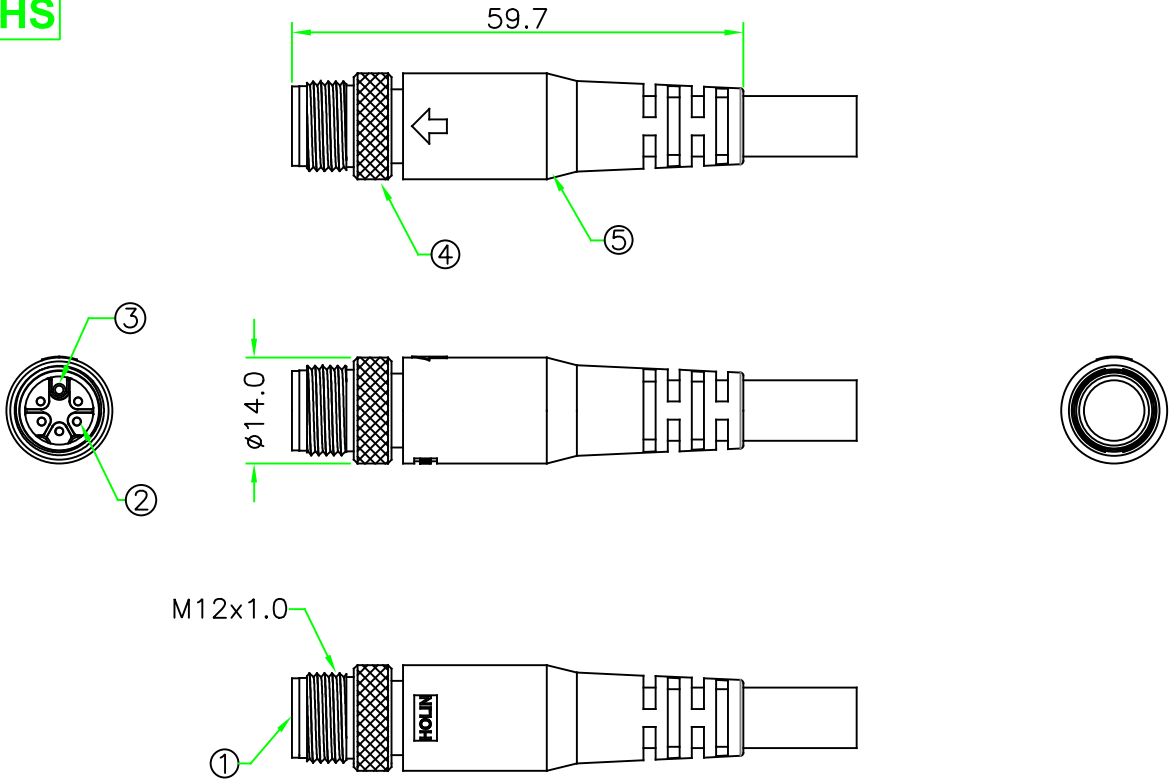


REV.	DESCRIPTION	DATE
A	ISSUE	Mar/13/2024

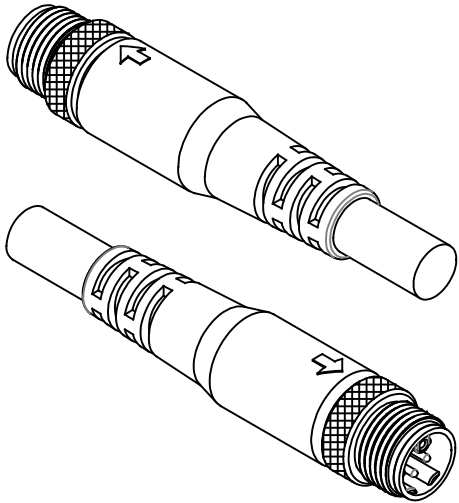

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 8A
VOLTAGE RATING : 630V
TEMPERTAURE RANGE : -25°c TO +85°C
DIELECTRIC WITHSTANDING VOLATGE: 500V AC FOR ONE MINUTE
 - HOW TO ORDER: M12P-M5xxSM

- 03 - 3 PIN (2+PE)
04 - 4 PIN (3+PE)
05 - 5 PIN (4+PE)
06 - 6 PIN (5+PE)

※Cable specification and length can be customized.

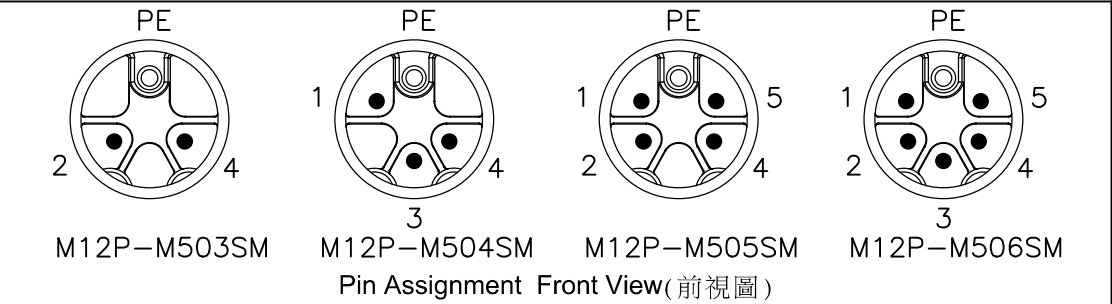

5	OVERMOLD	PU or PVC.	BLACK	1	
4	RING NUT	Brass, Nickel Plated.		1	M12D-MC-SN(A3)
3	CONTACT	Brass , 6 u" Gold Plated. Female Contact.		1	M12F-1.0SPL20.5(A1)
2	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		N	M12M-1.0SPL22(B)
1	CONNECTOR	M12 M-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : M12 M-Coding Male Connector Molded Cable Ass'y		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:		DR. SIBYL	
XX ± 1.0		M12P-M5xxSM		CH. JAMES	
.X ± 1.0 .XX ± 0.5					
.XXX ± 0.25 ANGLE ± 1°					
REV.		SHEET		DWG.NO:	
A		1/1		M12P-M5xxSM	
				AP.	