


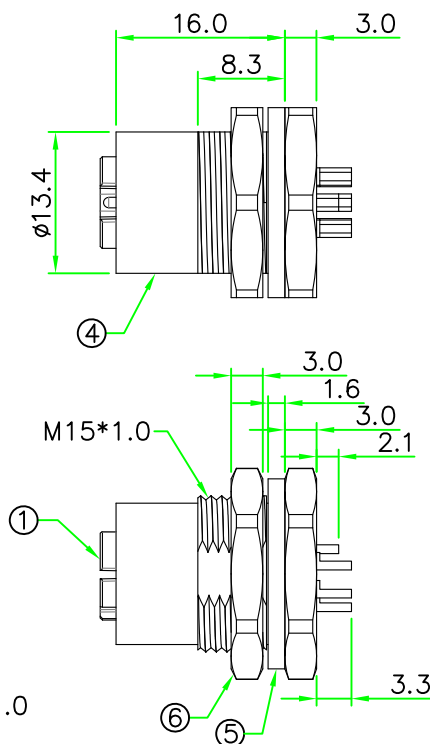


Recommended
Panel Cut-Out

RoHS

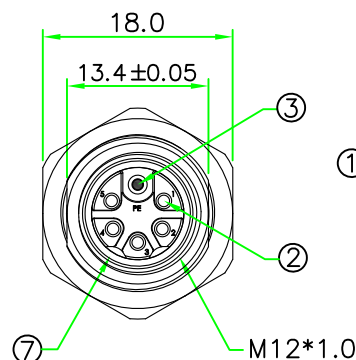

REV.	DESCRIPTION	DATE
A	ISSUE	May/03/2022

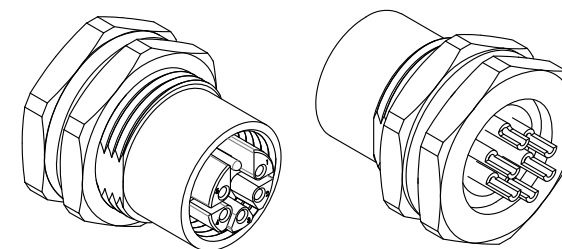

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 8A

VOLTAGE RATING : 630V

TEMPERATURE RANGE: -25°C TO +85°C


DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. PANEL THICKNESS MAX. 3.0mm

2. HOW TO ORDER: M12P-M6xxHSR

- 03 - 3 PIN (2+PE)
- 04 - 4 PIN (3+PE)
- 05 - 5 PIN (4+PE)
- 06 - 6 PIN (5+PE)

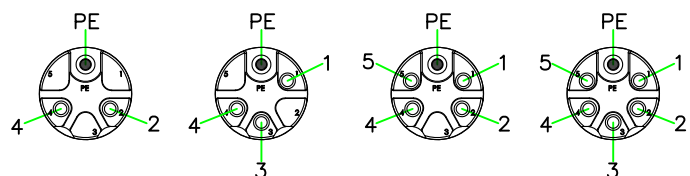

M12P-M603HSR M12P-M604HSR M12P-M605HSR M12P-M606HSR
PIN ASSIGNMENT FRONT VIEW (前視圖)

8	GLUE	EPOXY.	BLACK	1		HOLIN® HTP ASIA TECHNOLOGY CO., LTD 禾凌科技股份有限公司					
7	O-RING	VITON.	BLACK	1							
6	HEX NUT	BRASS.Nickel Plated.		1		 	UNIT: mm	TITLE M12 M-Coding Female Panel Connector			
5	GASKET	EPDM.	BLACK	1			SCALE 1.5:1	Rear mount Hex Flange With Solder Bucket Pin			
4	HOUSING	BRASS.Nickel Plated.		1		UNLESS OTHERWISE SPECIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX± 0.1 ANGLE ± 1°			P/N: M12P-M6xxHSR		DR. JAMES
3	CONTACT	BRASS, 6 u" Gold Plated. Male Contact.		1							CH. ERIC
2	CONTACT	BRASS, 6 u" Gold Plated. Female Contact.		N							
1	CONNECTOR	M12 M-Coding Female Connector Insert. NYLON+GF.	BLACK	1		REV. A	SHEET 1/1	DWG.NO: M12P-M6xxHSR		AP.	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS						