




RoHS

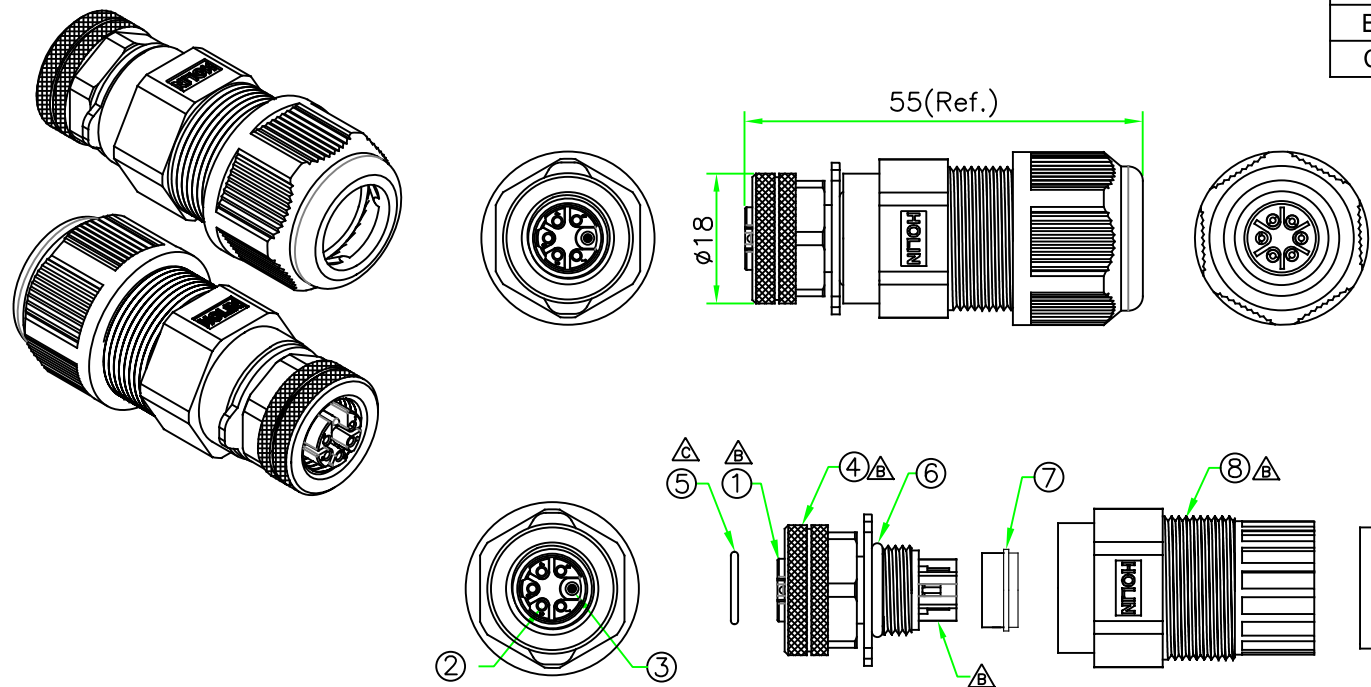

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 8A
VOLTAGE RATING : 630V
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: M12P-M6xxSA-x
- 1 - Tube 01 7mm
2 - Tube 02 9mm
3 - Tube 0310mm
4 - Tube 04 11mm
5 - Tube 05 12mm
6 - Tube 06 14mm
- 03 - 3 PIN (2+PE)
04 - 4 PIN (3+PE)
05 - 5 PIN (4+PE)
06 - 6 PIN (5+PE)

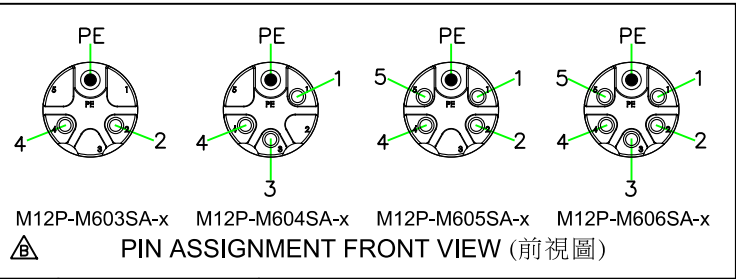

#2 Zipper PE Bag.

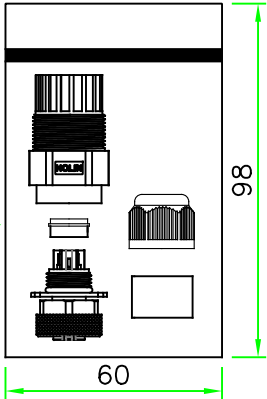

10	CLAMP NUT	Nylon+GF.	BLACK	1	
9	TUBE	EPDM.	BLACK	1	
8	HOOD	Nylon.	BLACK	1	
7	GASKET	Silicon.	BLACK	1	
6	O-RING	Silicon.	BLACK	1	
5	O-RING	Viton.	BLACK	1	O-0810-VK01
4	RING NUT	BRASS, Nickel Plated.		1	
3	CONTACT	BRASS, Male Pin. 6u" Gold Plated.		1	
2	CONTACT	BRASS, Female Pin. 6u" Gold Plated.		N	
1	CONNECTOR	M12 M-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE :	M12 M-Coding Female Connector Female/Male Pin Field Installable Plug
SCALE 1:1	P/N:	M12P-M6xxSA-x
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ±1°	DWG.NO:	M12P-M6xxSA-x
REV. C	SHEET 1/1	
		DR. JAMES CH. ERIC AP.