

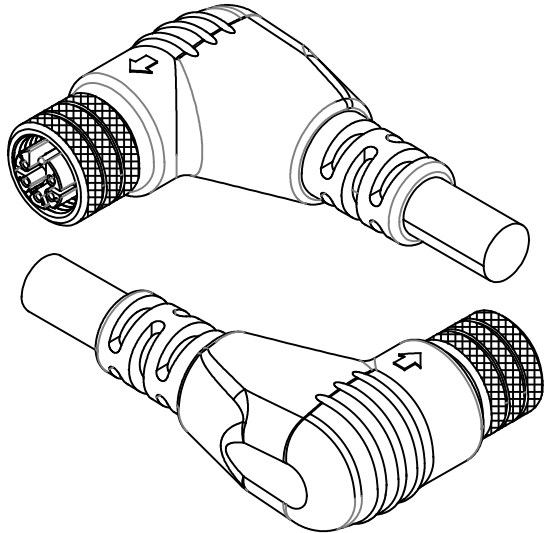
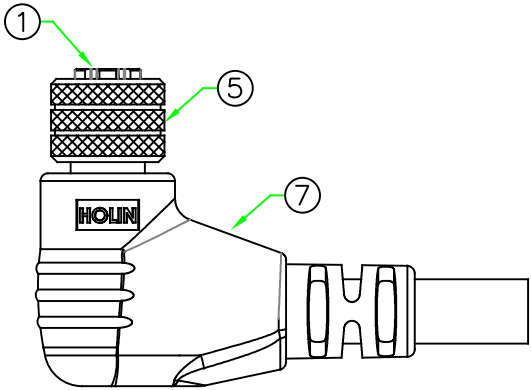
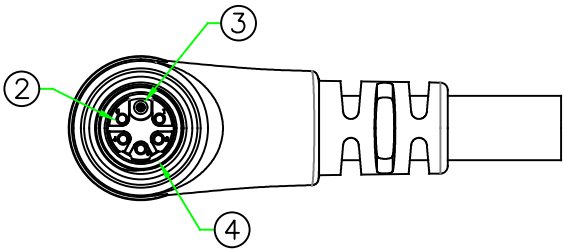
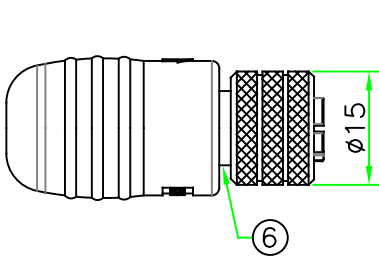


RoHS

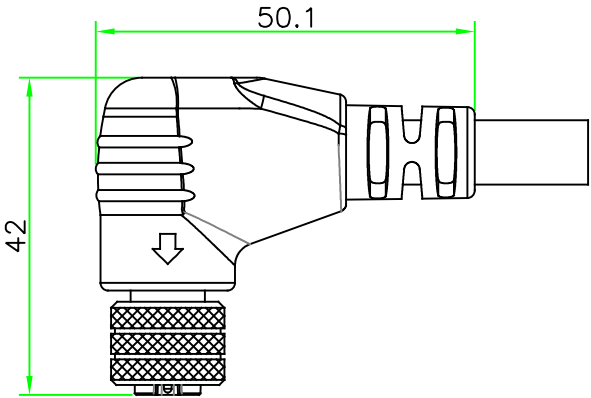

※Cable specification and length can be customized.

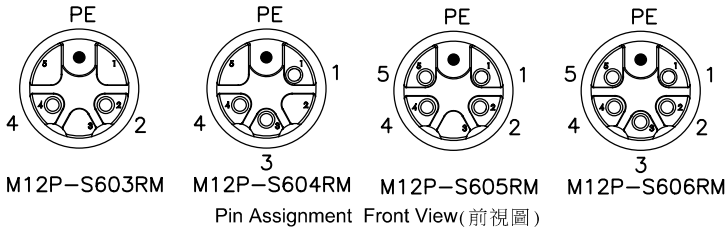

7	OVERMOLD	PU or PVC.	BLACK	1	309-135
6	METAL SHELL	Brass, Nickel Plated.		1	
5	RING NUT	Brass, Nickel Plated.		1	
4	O-RING	Viton.	BLACK	1	
3	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		1	
2	CONTACT	Brass , 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 M-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/09/2024

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 8A

VOLTAGE RATING : 630V

TEMPERTAURE RANGE : -25°c TO +85°c

DIELECTRIC WITHSTANDING VOLATGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: M12P-S6xxRM


03 - 3 PINS (2+PE)

04 - 4 PINS (3+PE)

05 - 5 PINS (4+PE)

06 - 6 PINS (5+PE)

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司



UNIT: mm

TITLE : M12 M-Coding Female Connector
Shielded With R/A Molded Cable Ass'y

SCALE

1:1

UNLESS OTHERWISE
SPECIED TOLERANCES:

XX. ± 1.0

.X ± 1.0 .XX ± 0.5

.XXX ± 0.25 ANGLE ± 1°

REV.

SHEET

P/N:

M12P-S6xxRM

DWG.NO:

M12P-S6xxRM

DR. SIBYL

CH. JAMES

AP.