



RoHS

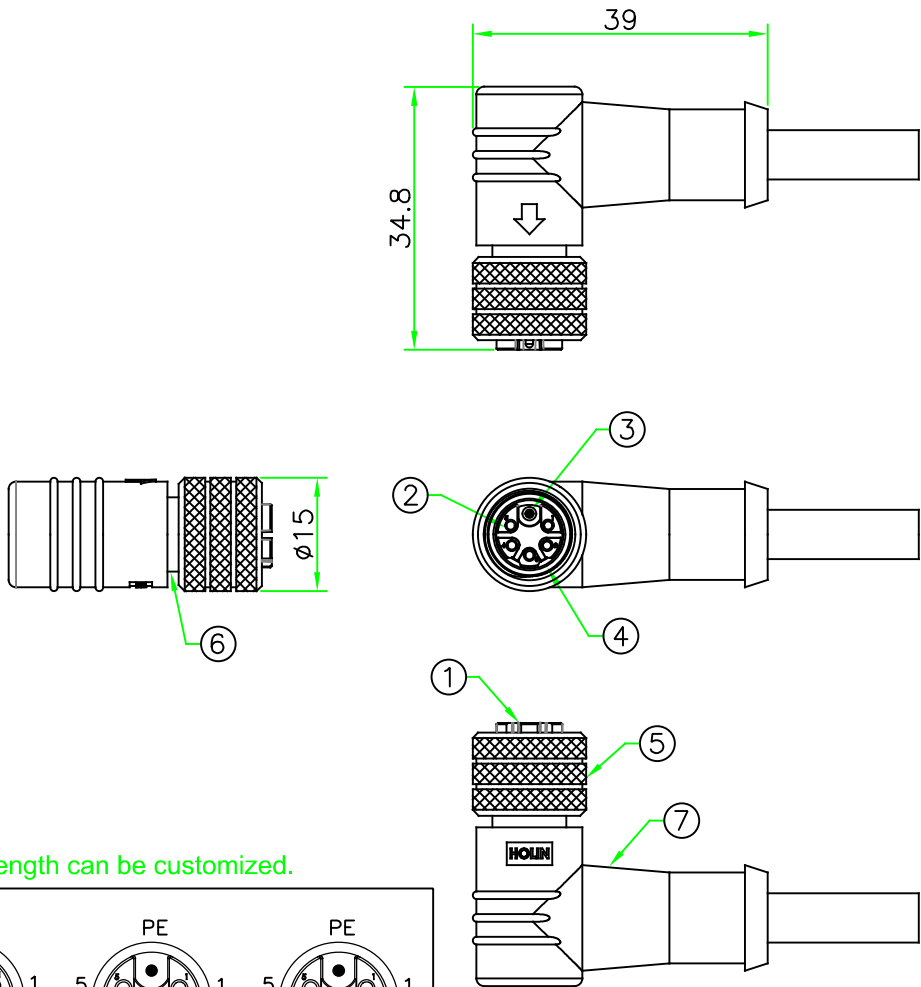


※Cable specification and length can be customized.

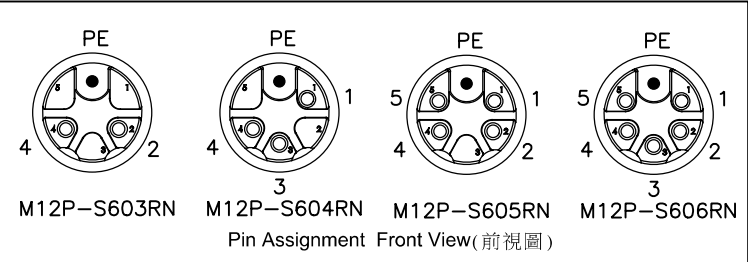

7	OVERMOLD	PU or PVC.	BLACK	1	202-135
6	METAL SHELL	Brass, Nickel Plated.		1	
5	RING NUT	Brass, Nickel Plated.		1	
4	O-RING	Viton.	BLACK	1	
3	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		1	
2	CONTACT	Brass , 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 M-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/08/2024

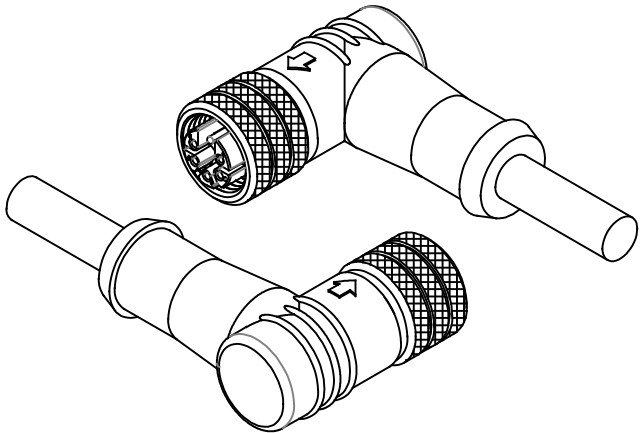

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 8A
VOLTAGE RATING : 630V
TEMPERTAURE RANGE : -25°c TO +85°C
DIELECTRIC WITHSTANDING VOLATGE: 500V AC FOR ONE MINUTE
2. HOW TO ORDER: M12P-S6xxRN
- 03 - 3 PINS (2+PE)
 - 04 - 4 PINS (3+PE)
 - 05 - 5 PINS (4+PE)
 - 06 - 6 PINS (5+PE)

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.		禾凌科技股份有限公司	
UNIT: mm	TITLE :	M12 M-Coding Female Shielded R/A Molded Cable Ass'y	
SCALE	1:1		
UNLESS OTHERWISE SPECIED TOLERANCES:		P/N:	
XX. ± 1.0		M12P-S6xxRN	
.X ± 1.0 .XX ± 0.5		DR. SIBYL	
.XXX ± 0.25 ANGLE ± 1°		CH. JAMES	
REV.	SHEET	DWG.NO:	AP.
A	1/1	M12P-S6xxRN	