

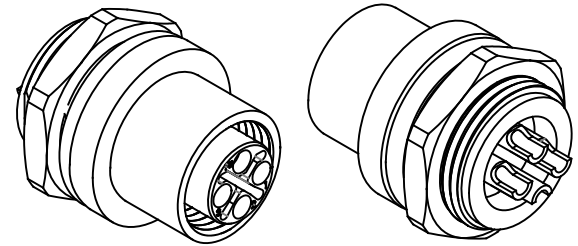

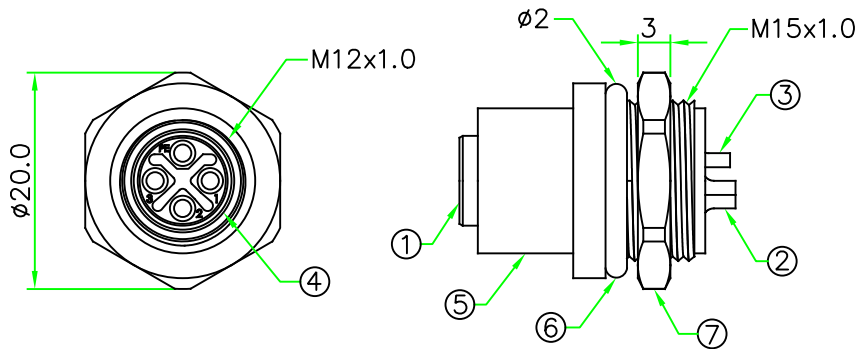


Recommended
Panel Cut-Out

RoHS

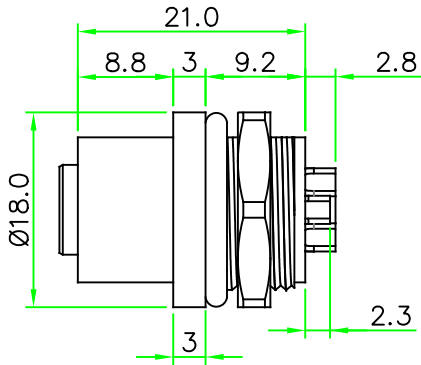

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 12A
VOLTAGE RATING : 630V
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - PANEL THICKNESS MAX. 3.0mm
 - HOW TO ORDER: S12P-M2xxCSF
03 - 2 PINS + PE
04 - 3 PINS + PE

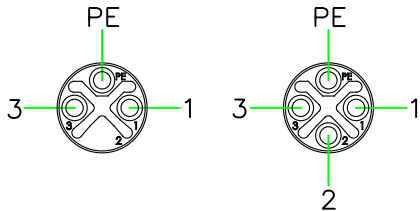

S12P-M203CSF

S12P-M204CSF

PIN ASSIGNMENT FRONT VIEW (前視圖)

8	GLUE	Epoxy.	BLACK	1		HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
7	HEX NUT	BRASS, Nickel Plated.		1		TITLE M12 S-Coding Female Panel Connector Front Mount Circular Flange With Solder Bucket Pin			
6	O-RING	SILICON.	RED	1					
5	METAL BODY	BRASS, Nickel Plated.		1		UNLESS OTHERWISE SPECIFIED TOLERANCES: xx. ± 0.5 .x ± 0.5 .xx ± 0.25 .xxx ± 0.1 ANGLE ± 1°		P/N: S12P-M2xxCSF	
4	O-RING	VITON.	BLACK	1		REV.	SHEET	DWG.NO: S12P-M2xxCSF	
3	CONTACT	BRASS , 6 u" Gold Plated . Female Contact.		1		A	1/1		
2	CONTACT	BRASS , 6 u" Gold Plated . Female Contact.		N				AP.	
1	CONNECTOR	M12 S-Coding Female Connector Insert.NYLON+GF.	BLACK	1					
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS				