
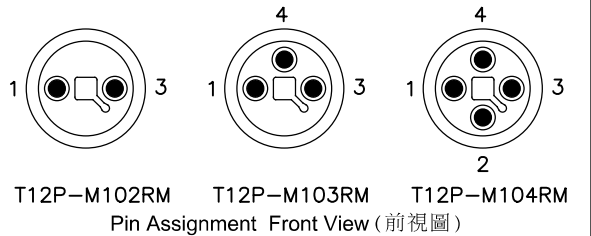
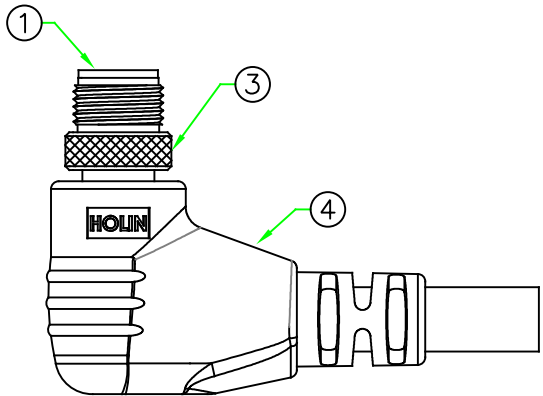
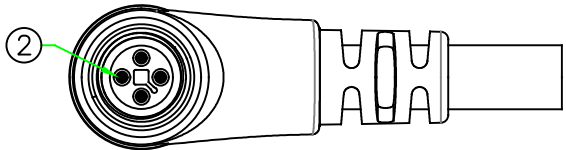
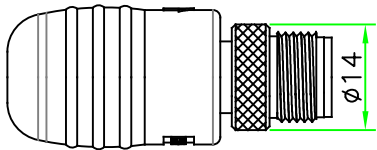




RoHS

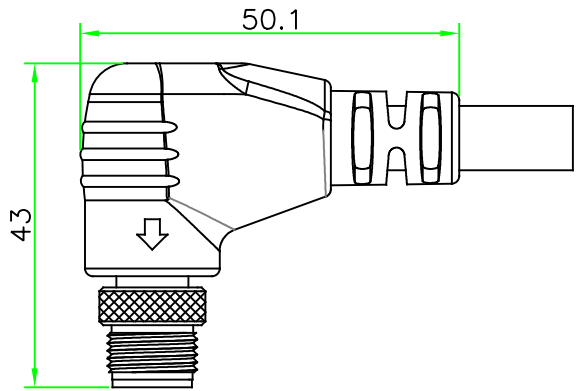

※Cable specification and length can be customized.

4	OVERMOLD	PU or PVC.	BLACK	1	309-135
3	RING NUT	Brass, Nickel Plated.		1	
2	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	M12 T-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/14/2024

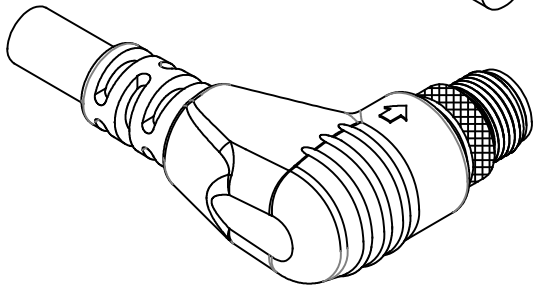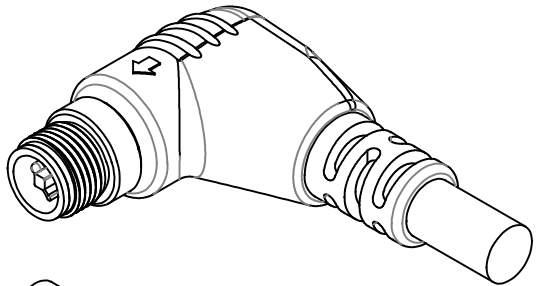

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 12A

RATED VOLTAGE:63V

TEMPERTAURE RANGE : -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLATGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: T12P-M1xxRM

02 - 2 PINS

03 - 3 PINS

04 - 4 PINS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司		
	UNIT: mm	TITLE : M12 T-Coding Male Connector R/A Molded Cable Ass'y
SCALE	1:1	
UNLESS OTHERWISE SPECIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N: T12P-M1xxRM
REV. A	SHEET 1/1	DWG.NO: T12P-M1xxRM
		DR. SIBYL CH. JAMES AP.