


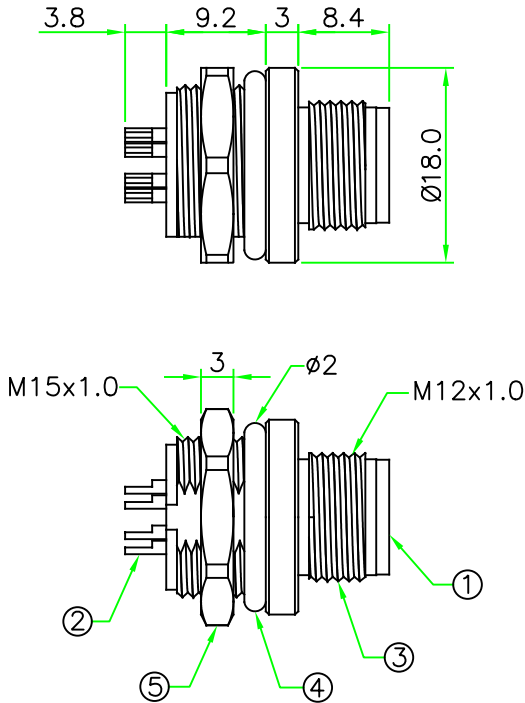


Recommended
Panel Cut-Out


RoHS

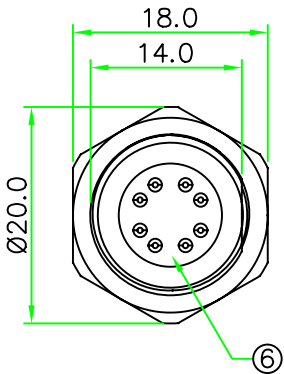

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/24/2024

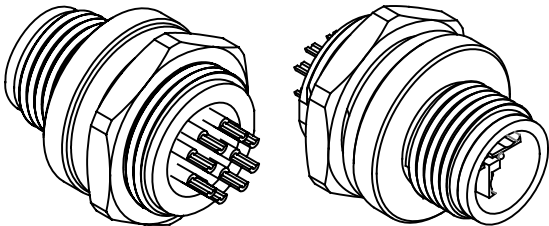

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 0.5A
RATED VOLTAGE : 48V
INSULATION RESISTANCE : ≥100M Ω
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - PANEL THICKNESS MAX. 3.0mm



PIN ASSIGNMENT
FRONT VIEW
(前視圖)

6	GLUE	Epoxy.	BLACK	1	
5	HEX NUT	BRASS, Nickel Plated.		1	
4	O-RING	SILICON.	RED	1	
3	HOUSING	BRASS, Nickel Plated.		1	
2	CONTACT	BRASS , 6u" Gold Plated . Male Contact.		8	
1	CONNECTOR	M12 X-Coding Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE M12 X-Coding Male Panel Connector Front Mount Circular Flange With Solder Bucket Pin			
SCALE	1.5:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX± 0.1 ANGLE ± 1°		P/N: X12I-M108CSF		DR. JAMES	
				CH. ERIC	
REV. A	SHEET 1/1	DWG.NO: X12I-M108CSF		AP.	