

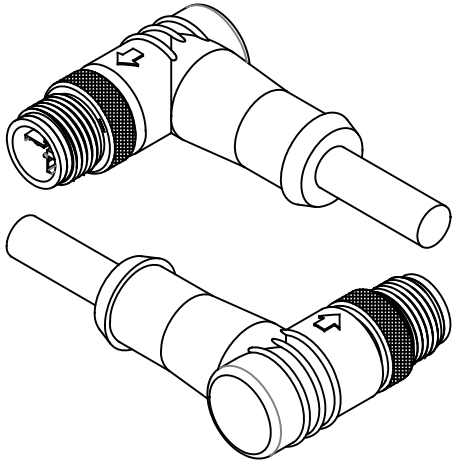


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/22/2024

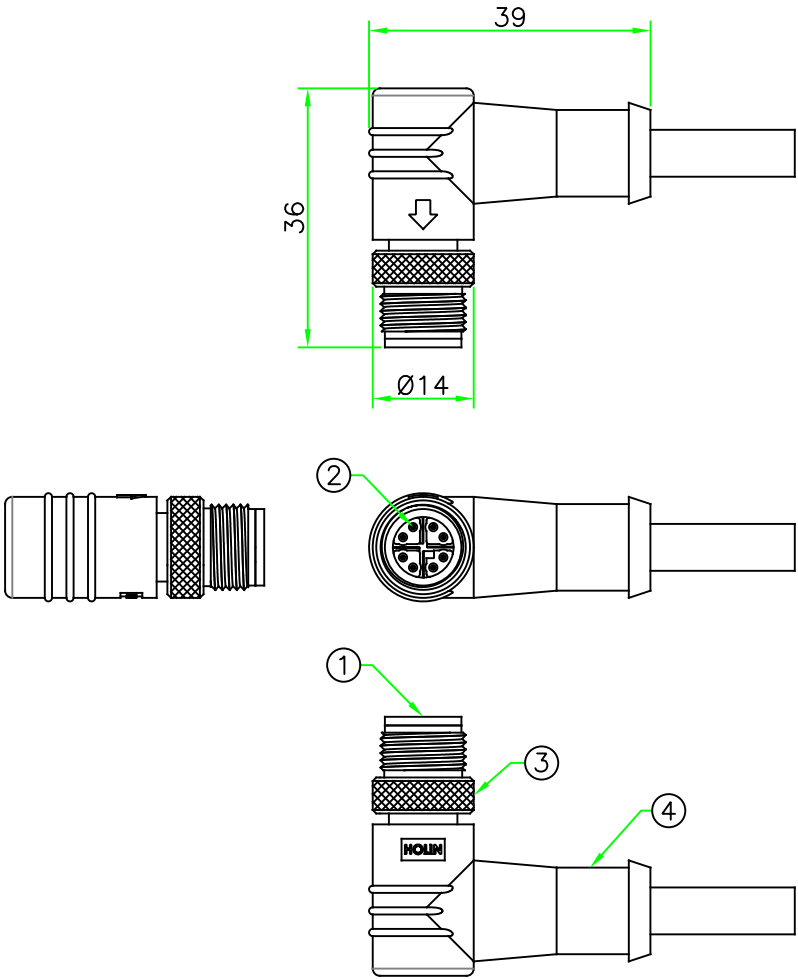

NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 0.5 A
RATED VOLTAGE : 48 V
INSULATION RESISTANCE : ≥100M Ω
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE



PIN ASSIGNMENT
FRONT VIEW
(前視圖)

※Cable specification and length can be customized.

4	OVERMOLD	PU or PVC.	BLACK	1	202-135
3	RING NUT	BRASS, Nickel Plated.		1	
2	CONTACT	BRASS , 6u" Gold Plated. Male Contact.		8	
1	CONNECTOR	M12 X-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : M12 X-Coding Male Connector Right Angle Molded Cable Ass'y		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:			
XX. ± 1.0		DR. JAMES			
.X ± 1.0 .XX ± 0.5		CH. ERIC			
.XXX ± 0.25 ANGLE ± 1°					
REV.	SHEET	DWG.NO:			
A	1/1	X12I-M108RN			