




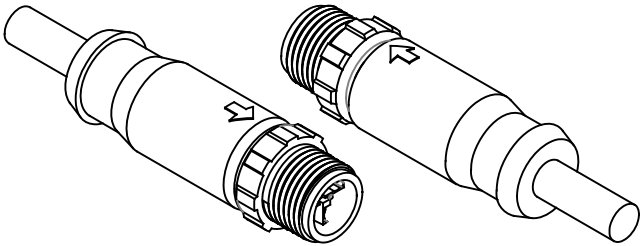
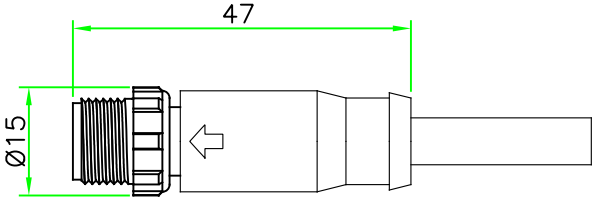


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/22/2024



NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 0.5 A
RATED VOLTAGE : 48 V
INSULATION RESISTANCE : $\geq 100M \Omega$
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

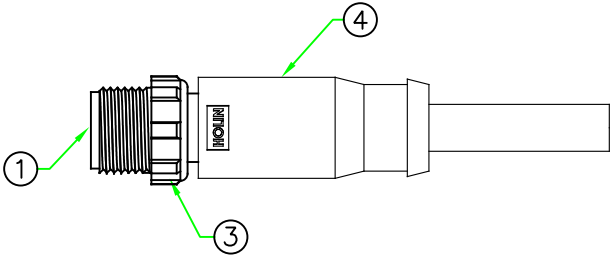

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

※Cable specification and length can be customized.

4	OVERMOLD	PU or PVC.	BLACK	1	98-135
3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	BRASS , 6u" Gold Plated. Male Contact.		8	
1	CONNECTOR	M12 X-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : M12 X-Coding Male Connector All Plastic Molded Cable Ass'y			
SCALE	1:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:		DR. JAMES	
XX. ± 1.0		X12I-P108SN		CH. ERIC	
.X ± 1.0 .XX ± 0.5					
.XXX ± 0.25 ANGLE ± 1°					
REV.	SHEET	DWG.NO:		AP.	
A	1/1	X12I-P108SN			