

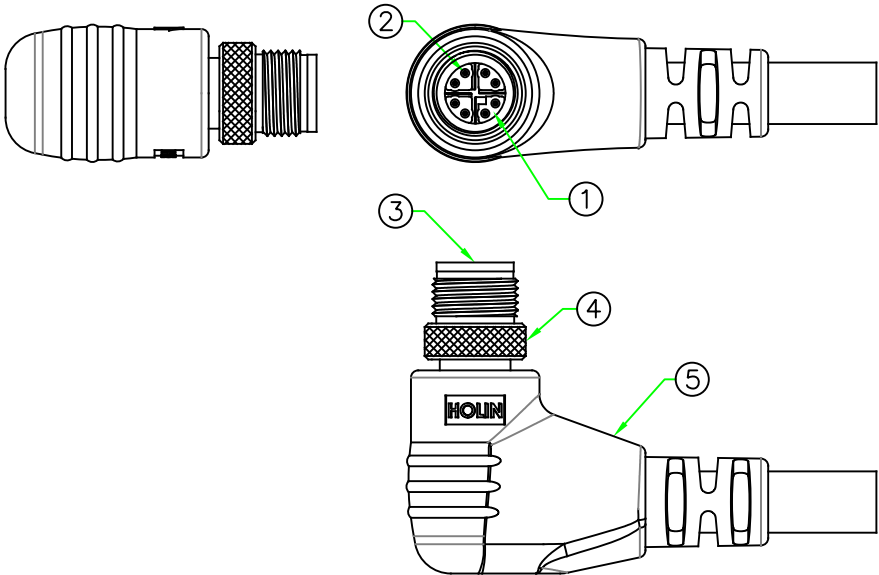



RoHS

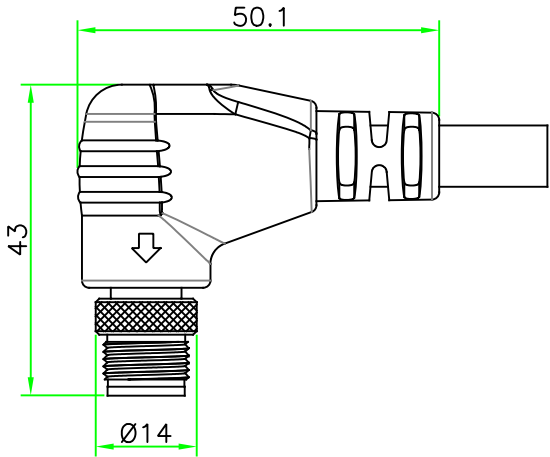

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

※Cable specification and length can be customized.

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/22/2024

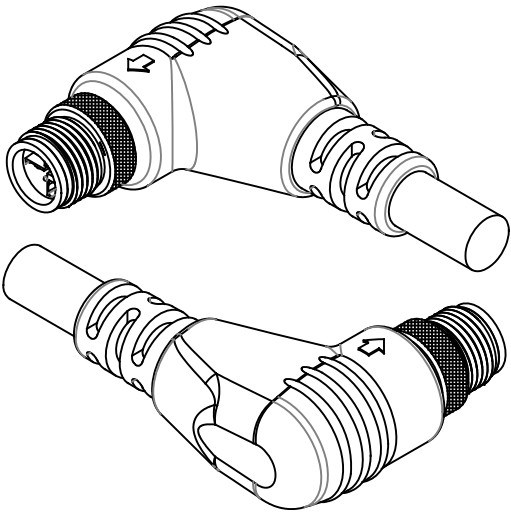

NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 0.5 A
RATED VOLTAGE : 48 V
INSULATION RESISTANCE : $\geq 100\text{M } \Omega$
TEMPERATURE RANGE: -25°C TO $+85^{\circ}\text{C}$
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

5	OVERMOLD	PU or PVC.	BLACK	1	309-135
4	RING NUT	BRASS , Nickel Plated.		1	
3	METAL SHELL	BRASS , Nickel Plated.		1	
2	CONTACT	BRASS , 6u" Gold Plated. Male Contact.		8	
1	CONNECTOR	M12 X-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

※Cable specification and length can be customized.					HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
							UNIT:mm	TITLE : M12 X-Coding Male Connector Shielded R/A Molded Cable Ass'y		
					SCALE		1:1			
					UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°			P/N: X12I-S108RM		DR. JAMES
PU or PVC.		BLACK	1	309-135						
BRASS , Nickel Plated.			1							
BRASS , Nickel Plated.			1							
BRASS , 6u" Gold Plated. Male Contact.			8							
M12 X-Coding Male Connector Insert. Nylon+GF.		BLACK	1							
DESCRIPTION		COLOR	Q'TY	REMARKS	A	SHEET 1/1	DWG.NO: X12I-S108RM		AP.	